

NEWPORT BATH

BP ROUGH VALVE

Features

Solid brass construction
Provides anti-scald protection and temperature regulation
Pressure-balancing technology maintains water temp. +/- 2 degrees Fahrenheit
High-temperature safety stop ensures water temp. stays below maximum setting
Integral hot and cold inlet stops ensure easy cartridge access
1-1/16" functional depth (center-back) enables back-to-back installation
Max handle rotational requirement of 150 degrees to achieve max temp setting


1-684



Codes / Standards Compliance

Meets or exceeds the following at date of manufacture:


ASME A112.18.1/CSA B125.1-18
IAPMO/cUPC
IPC
ASSE 1016/ASME A112.1016
All applicable US Federal and State material regulations

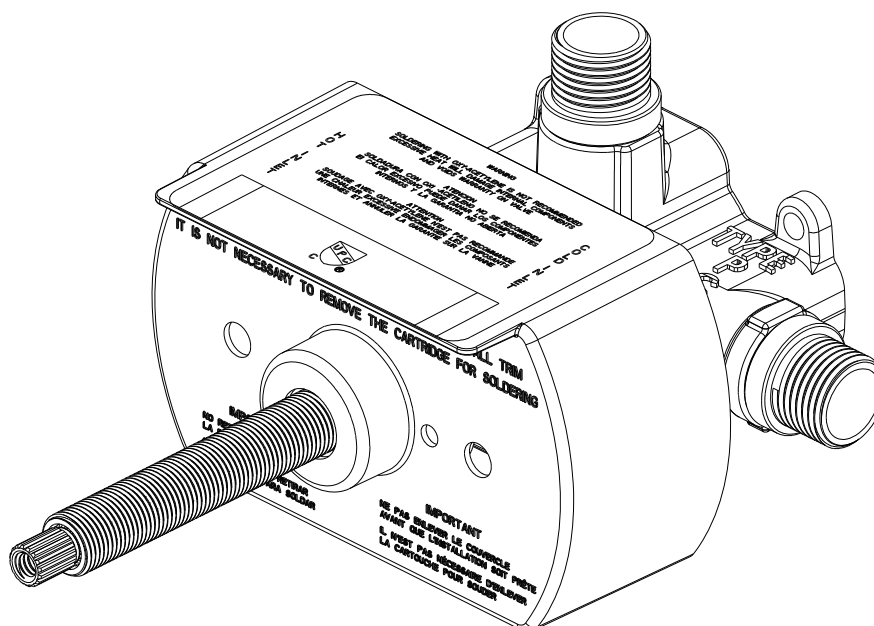

1-684

PRODUCT DIMENSIONS *(Units are in inches)*

Product Dimensions are provided for reference only. For specific product installation guidelines, please reference the Installation Instructions of the product being installed.

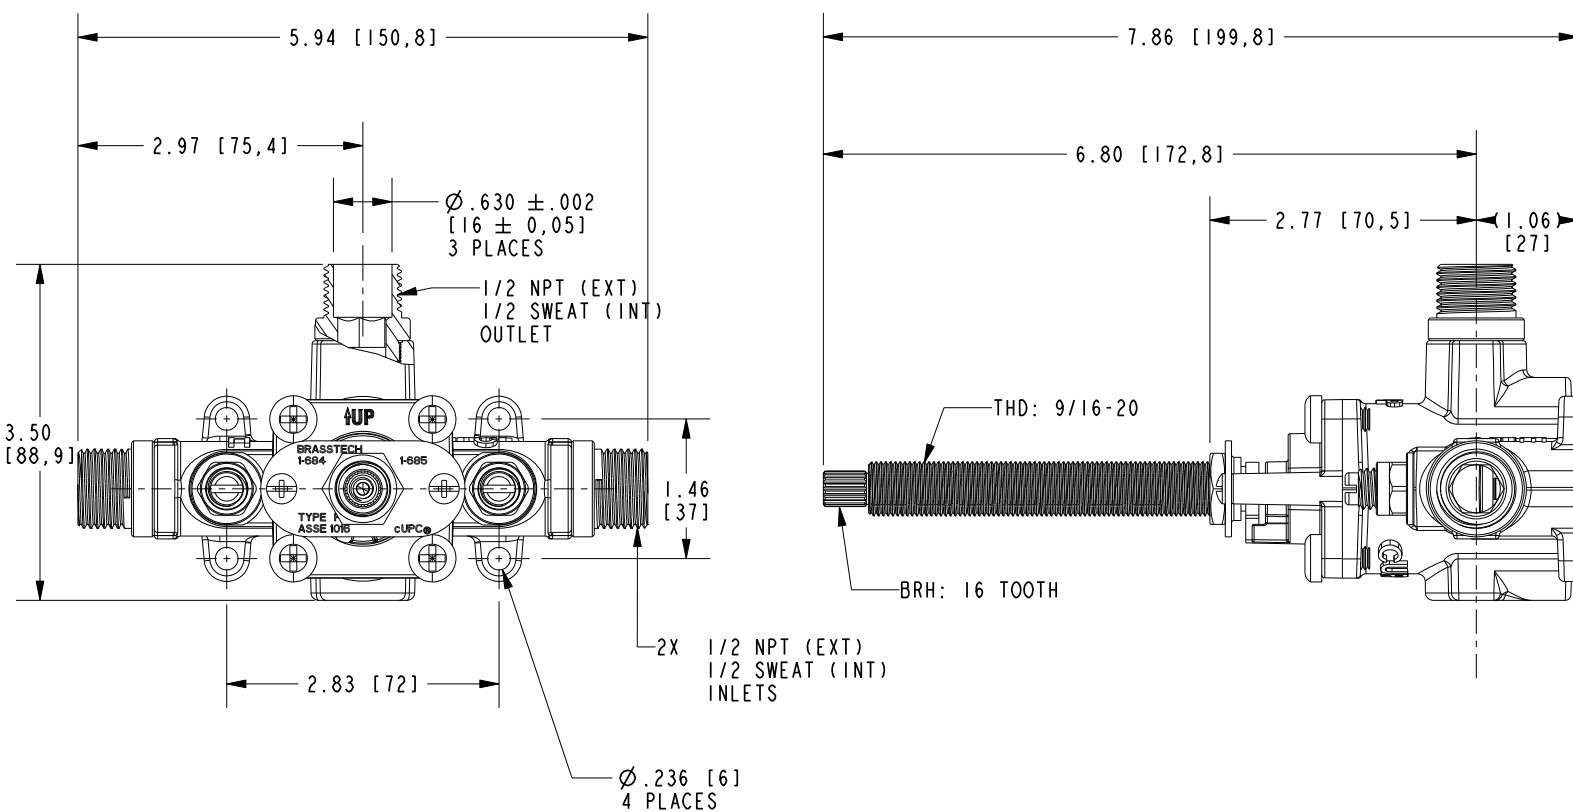

(MUD COVER IS HIDDEN IN ALL THE VIEWS)

BP ROUGH VALVE

1-684

Page 2 of 2

EN- 5038

REV G

NEWPORT BRASS.

Flawless Beauty. From Faucet to Finish.

t: 949.417.5207 | www.newportbrass.com

©2025 NewportBrass