



# CRYSTORAMA




LIGHTING THE WAY FOR SIXTY YEARS

## ASSEMBLY INSTRUCTION MODEL #1137-CH-CL-MWP

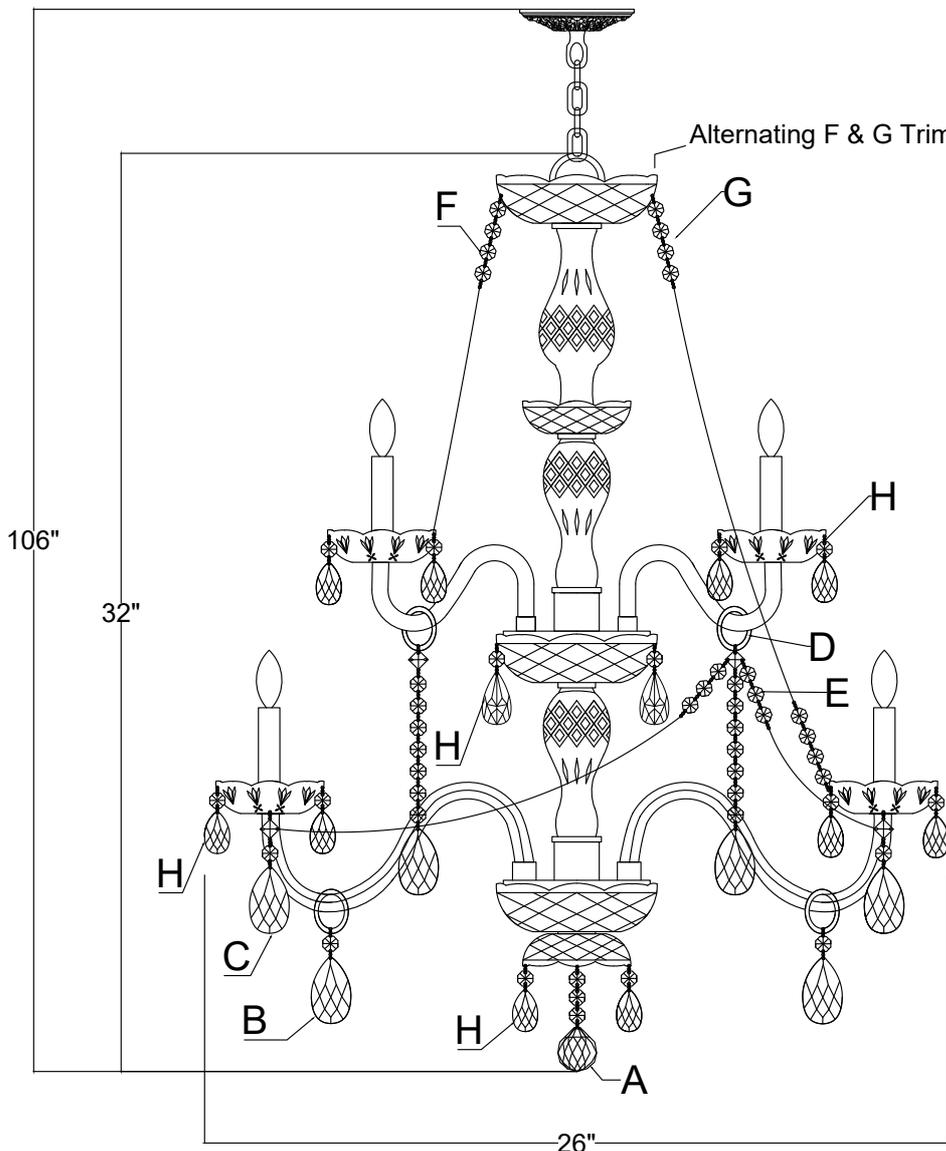

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 12- Candelabra Base Bulb  
40 Watts recommended 60 Watts Max.  
USE LED BULBS FOR EXTENDED USE

The fixture is Damp rated

### HOW TO INSTALL:

Place the fixture parts on a soft cloth-covered platform before installation of fixture.

- To install the 6" arms, slightly loosen each screw on the metal plate. Pull a female plug through a hole in the upper metal plate. Connect the male plug at the end of the upper arm with the female plug that was just pulled. Push the end of the arm with the metal tab through the hole until stopped by the metal tab (this should also push the wires and plugs back inside the metal plate). Twist the metal tab counter-clock wise until both inserts lock onto the loose screws. Tighten the screw securing the arm in place. Repeat for all 6" arms.
- Repeat Step 1 for the 10" arms. The 10" arms attaches on the bottom tier.
- Place the metal washer, bobèche and metal washer in that order, over the distributor box-2. Secure with the finial.
- Screw the Center column kit 1 onto the center column kit 2.
- Attach the mounting bar onto the outlet box.
- Decide the desired hanging height and adjust the chain to the correct length.
- Raise the fixture up and do the wire connection. Attach the canopy over the mounting bar and secure with collar ring.
- Dress the crystals as illustrated.

### Crystal Sets

- A. 1 Piece. (3)14mm+(1)AS8-40mm Ball
- B. 6 Sets. (1)Ring + (1)14mm + AS9-2.5"
- C. 6 Sets. (1)Square + (1)14mm + AS9-2.5"
- D. 6 Sets. (1)Ring + (1)Square + (7)14mm + AS9-2.5"
- E. 12 Sets. (17)14mm
- F. 6 Sets. (18)14mm
- G. 6 Sets. (29)14mm
- H. 71 Sets. (1)14mm+AS9-2"

**⚠ WARNING:** This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

# CRYSTORAMA



Crystorama.com

LIGHTING THE WAY FOR SIXTY YEARS

## ASSEMBLY INSTRUCTION MODEL #1137-CH-CL-MWP

### Part Number

#### Part Numbers

- A. (1)-Mounting hardware  
Wire connector x2.  
Mounting bar x1.  
Lock washer x1.  
Hex nut x1.  
Nipple x1.  
Screw x2.
- B. (1)-Canopy (W5"xH1")-XSN1130CHCAN5IN
- C. (1)-Collar Ring
- D. (1)-Collar Loop-XSN1130CHLOOP
- E. (1)-Chain (4mmx72")-XSN1130CHCHA4MM
- F. (1)-Center Column Kit Loop
- G. (1)-Center Column Kit 1  
Top Bowl ; Ø6", 12pin, 14mm center hole.  
-XSN1137CHDIBOB12PN  
Glass Vase ; H8"  
Top Bobeche ; Ø4", no pin, 24mm center hole.  
-XSN1137BOB4IN  
Glass Vase ; H6"  
Metal Cover ; H1.5"
- H. (6)-6" Arms with holder-XSN500CHARM6INKD
- I. (13)-Bobeche; Ø4", 5pin, 24mm center hole.  
-XSN1137CHBOB4IN
- J. (1)-Center Column Kit 2  
Center Bowl ; Ø6", 6pin, 14mm center hole.  
-XSN1137CHDIBOB6PN  
Distributor Box-1 ; Ø5", 11mm center hole.  
Glass Vase ; H6"  
Bottom Bowl ; Ø6", no pin, 14mm center hole.  
-XSN1137DIBOB6IN  
Distributor Box-2 ; Ø5", 11mm center hole.
- K. (6)-10" Arms with holder-XSN500CHARM10INKD
- L. (12)-Male Plug
- M. (2)-Metal washer
- N. (1)-Finial-XSN1130CHFIN
- O. (12)-PVC candle sleeve ; H4

