



CRYSTORAMA




LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL #1138-PB-CL-S

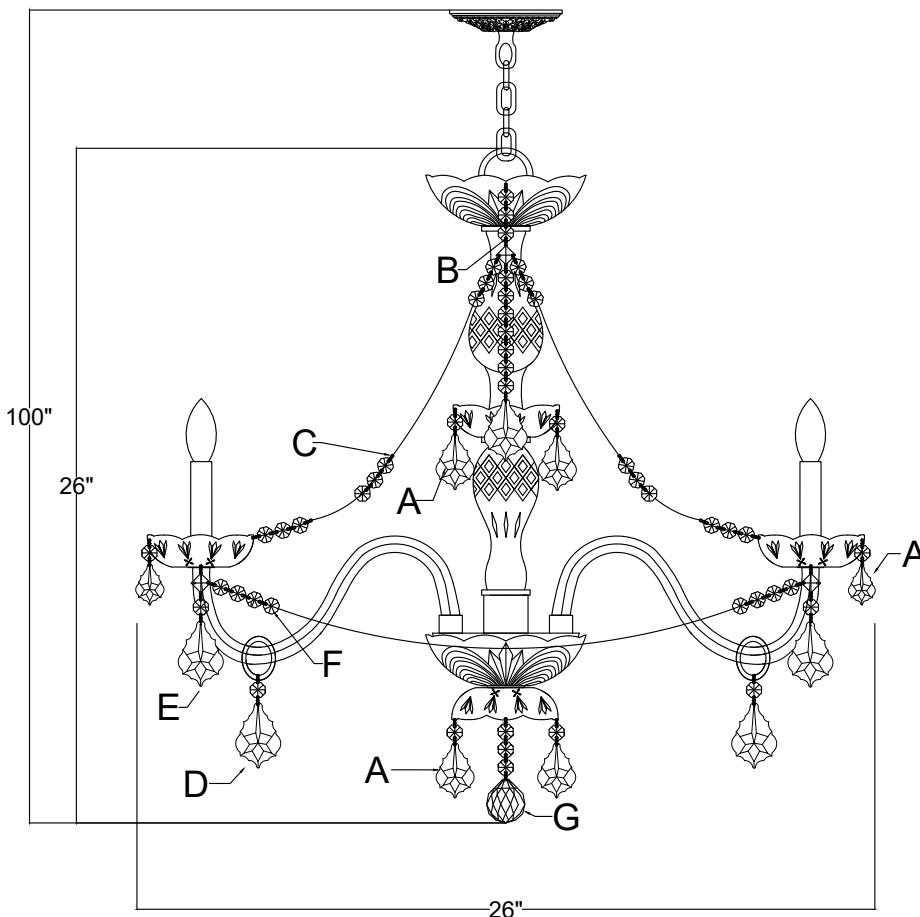

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 8- Candleabra Base Bulb
40 Watts recommended 60 Watts Max.
USE LED BULBS FOR EXTENDED USE

The fixture is Damp rated

HOW TO INSTALL:

Place the fixture parts on a soft cloth-covered platform before installation of fixture.

- To install the 10" arms, slightly loosen each screw on the metal plate. Pull a female plug through a hole in the upper metal plate. Connect the male plug at the end of the upper arm with the female plug that was just pulled. Push the end of the arm with the metal tab through the hole until stopped by the metal tab (this should also push the wires and plugs back inside the metal plate). Twist the metal tab counter-clock wise until both inserts lock onto the loose screws. Tighten the screw securing the arm in place. Repeat for all 10" arms.
- Screw the Center column kit onto the distributor box.
- Place the bottom bowl, metal washer, bobèche and metal washer in that order, over the distributor box. Secure with the finial.
- Attach the mounting bar onto the outlet box.
- Decide the desired hanging height and adjust the chain to the correct length.
- Raise the fixture up and do the wire connection. Attach the canopy over the mounting bar and secure with collar ring.
- Dress the crystals as illustrated.

Crystal Sets

- A. 50 Set (1)14mm + AS20-2"
- B. 8 Sets. (3)14mm + (1)Square + (7)14mm + AS20-2.5"
- C. 16 Set (20)14mm
- D. 8 Sets. (1)Ring + (1)14mm + AS20-2.5"
- E. 8 Sets. (1)Square + (1)14mm + AS20-2.5"
- F. 8 Sets. (14)14m
- G. 1 Piece. (3)14mm+AS8-40mm Bal

⚠ WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.p65warnings.ca.gov

CRYSTORAMA



Crystorama.com

LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL #1138-PB-CL-S

Part Number

Part Numbers

A. (1)-Mounting hardware
 Wire connector ×2.
 Mounting bar ×1.
 Lock washer ×1.
 Hex nut ×1.
 Nipple ×1.
 Screw ×2.

B. (1)-Canopy (W5"xH1")-XSN1130PBCAN5IN

C. (1)-Collar Ring

D. (1)-Collar Loop-XSN1130PBLOOP

E. (1)-Chain (4mmx72")-XSN1130PBCHA4MM

F. (1)-Center Column Kit Loop

G. (1)-Center Column Kit

Top Bowl ; Ø6", 8pin, 13mm center hole.

-XSN1138PBDIBOB8PN

Glass Vase; H8"

Top Bobeche ; Ø4", 5pin, 24mm center hole.

-XSN1135PBBOB4IN

Glass Vase; H6"

Metal Cover ; H1.5"

H. (8)-10" Arms with holder-XSN500GDARM10INKD

I. (10)-Bobeche ; Ø4", 5pin, 24mm center hole.

-XSN1138PBBOB4IN

J. (8)-Male Plug

K. (1)-Distributor box with female plug ;
 Ø5 1/2" ; 11mm center hole.

L. (1)-Bottom bowl ; Ø6", no pin, 13mm center hole.

-XSN1138DIBOB6IN

M. (2)-Metal washer

N. (1)-Finial-XSN1130PBFIN

O. (8)-PVC candle sleeve ; H4"

