



CRYSTORAMA




Crystorama.com

LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL #1139-CH-CL-MWP

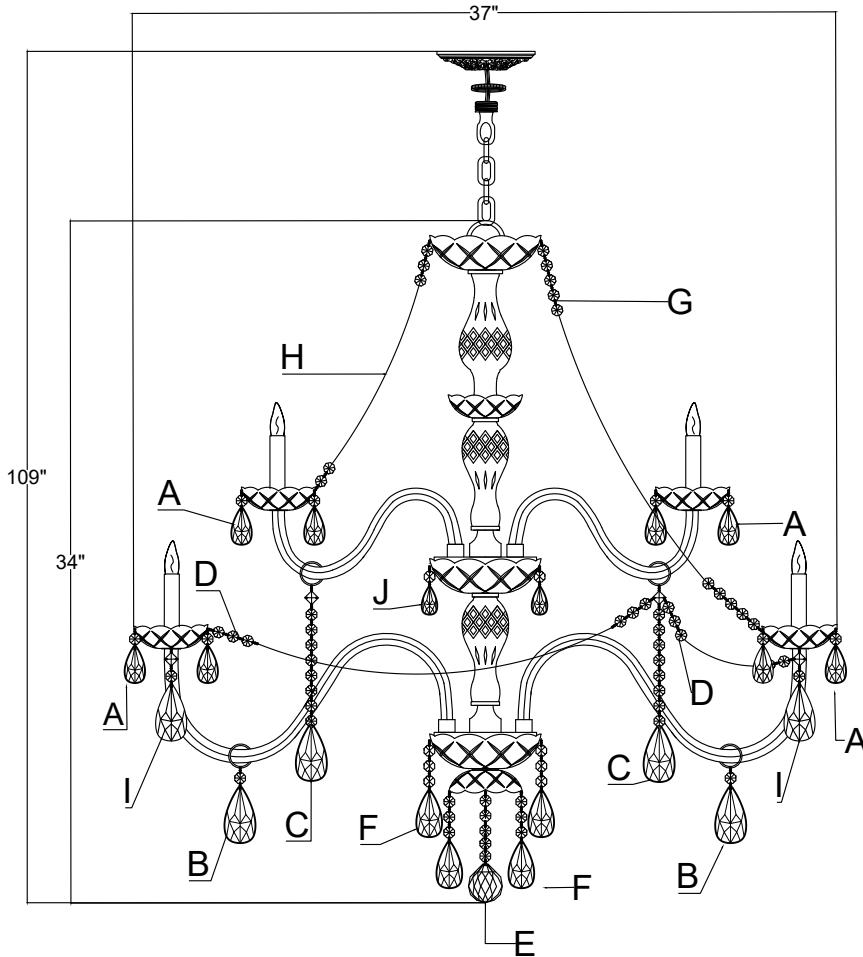

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 16- Candelabra Base Bulb
40 Watts recommended 60 Watts Max.
USE LED BULBS FOR EXTENDED USE

The fixture is Damp rated

HOW TO INSTALL:


Place the fixture parts on a soft cloth-covered platform before installation of fixture.

- To install the upper arms, slightly loosen each screw on the upper metal plate. Pull a female plug through a hole in the upper metal plate. Connect the male plug at the end of the upper arm with the female plug that was just pulled. Push the end of the arm with the metal tab through the hole until stopped by the metal tab (this should also push the wires and plugs back inside the metal plate). Twist the metal tab counter-clock wise until both inserts lock onto the loose screws. Tighten the screw securing the arm in place. Repeat for all upper arms.
- Repeat Step1 using the Lower metal plate and the lower arms.
- Place the bottom bowl, check ring, bottom bobèche, check ring, in that order, over the bottom distributor box. Secure with the finial.
- Screw the Center column kit onto the Bottom column kit.
- Attach the mounting bar onto the outlet box.
- Decide the desired hanging height and adjust the chain to the correct length.
- Raise the fixture up and do the wire connection. Attach the canopy over the mounting bar and secure with collar ring.
- Dress the crystals as illustrated.

Crystal Sets

- A. 96 Sets. (1)14mm + AS9-2"
- B. 8 Sets. (1)Ring + (1)14mm+AS9-3"
- C. 8 Sets. (1)Ring + (1)Square+ (8)14mm + AS9-3"
- D. 16 Sets. (22) 14mm
- E. 1 Piece. (1)14mm + AS8-50mm Ball
- F. 14 Sets. (3)14mm + AS9-2.5"
- G. 8 Sets. (31) 14mm
- H. 8 Sets. (19) 14mm
- I. 8 Sets. (1)Square + (1)14mm + AS9-2.5"
- J. 8 Sets. (1)14mm + AS9-1.5"

DETAILED ILLUSTRATION

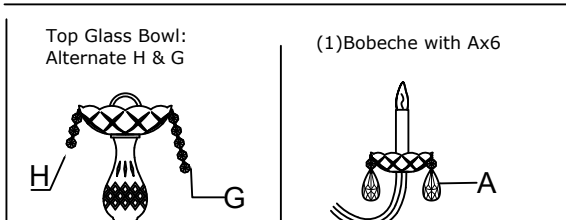

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.p65warnings.ca.gov

CRYSTORAMA



Crystorama.com

LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL #1139-CH-CL-MWP

Part Number

Part Numbers

- A. (1)-Mounting hardware
Wire connector ×2.
Mounting bar x1.
Lock washer ×1.
Hex nut ×1.
Nipple ×1.
Screw ×2.
- B. (1)-Canopy (W5"xH1")-XSN1130CHCAN5IN
- C. (1)-Collar Ring
- D. (1)-Collar Loop-XSN1130CHLOOP
- E. (1)-Chain (4mmx72")-XSN1130CHCHA4MM
- F. (1)-Center Column Kit Loop
- G. (1)-Center Column Kit
Top Glass Bowl ; Ø6", 16pin,14mm center hole.
-XSN1139CHDIBOB16IN
Glass Vase; H8"
Center Bobeche ; Ø4", no pin,24mm center hole.
-XSN1137BOB4IN
Glass Vase; H6"
Metal Cover ; H1.5"
- H. (16)-PVC candle sleeve
- I. (17)-Bobeche ; Ø4", 6pin,24mm center hole.
-XSN7464CHBOB6PN
- J. (8)-10" Upper Arms with Male Plug
-XSN500CHARM10INKD
- K. (1)-Bottom Column Kit
Coupling.
Upper Metal plate with Female Plug.
Center Glass Bowl ; Ø6", 8pin,14mm center hole.
-XSN1139CHDIBOB6IN
Glass Vase; H6"
Metal Cover ; H1.5"
Lower Metal plate with Female Plug.
Metal Bowl ; Ø5.5"
- L. (8)-15" Lower Arms with Male Plug
-XSN500CHARM15INKD
- M. (2)-Check Ring
- N. (1)-Bottom Glass bowl ; Ø6", 8pin,14mm center hole.
-XSN1139CHDIBOB6IN
- O. (1)-Finial-XSN1130CHFIN

