

Features

Brass Construction
Euro-motion ceramic disc 40 mm valve cartridge
9.25 gallons (35 liters) per minute spout maximum flow rate
3/4" braided hot and cold supply lines (with 1/2" adapters)
37.99" (96.5 cm) tub spout height at outlet
8.66" (22.0 cm) tub spout reach (center-center)
Contemporary handshower design of resin construction
Floor mounting bracket with integral base and escutcheon
ADA Compliant (Handles Only)
1.8 GPM (6.8 LPM) Max, Handshower Only


Tub and Handshower Set
2040-4261



Codes / Standards Compliance

Meets or exceeds the following at date of manufacture:

ASME A112.18.1/CSA B125.1
IAPMO/cUPC
IPC
ADA & ICC/ANSI A117.1 (Handle Only)
Energy Policy Act of 1992
EPA WaterSense
California Energy Commission
ASME A112.18.3 (Back Flow)
All applicable US Federal and State material regulations

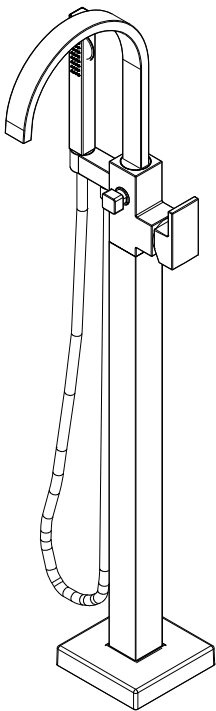

ACCESSORY OPTIONAL

System Element	1-339
Description	Freestanding Tub Fill Rough Kit (Floor Mount)
Image	A line drawing of the Freestanding Tub Fill Rough Kit (Floor Mount). It is a circular, flange-like component with a central opening and several mounting holes around the perimeter. A small handle or lever is visible on the right side.

PRODUCT DIMENSIONS *(Units are in inches)*

Technical drawing of the 59 inch hose reel assembly. The drawing shows a side view of the assembly with a vertical support and a horizontal hose reel. The dimensions are as follows:

- Overall height: 39.46 [1002,4]
- Height of the hose reel: 30.35 [771]
- Height of the hose reel from the base: 28.54 [725]
- Width of the hose reel: 8.15 [207,1]
- Width of the hose reel from the base: 3.04 [77,2]
- Width of the hose reel from the base (inner): 1.00 [25,4]
- Hose length: 59" HOSE
- Base diameter: $\varnothing 3.54$ [90]

