


CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL #5086-PB-CL-S

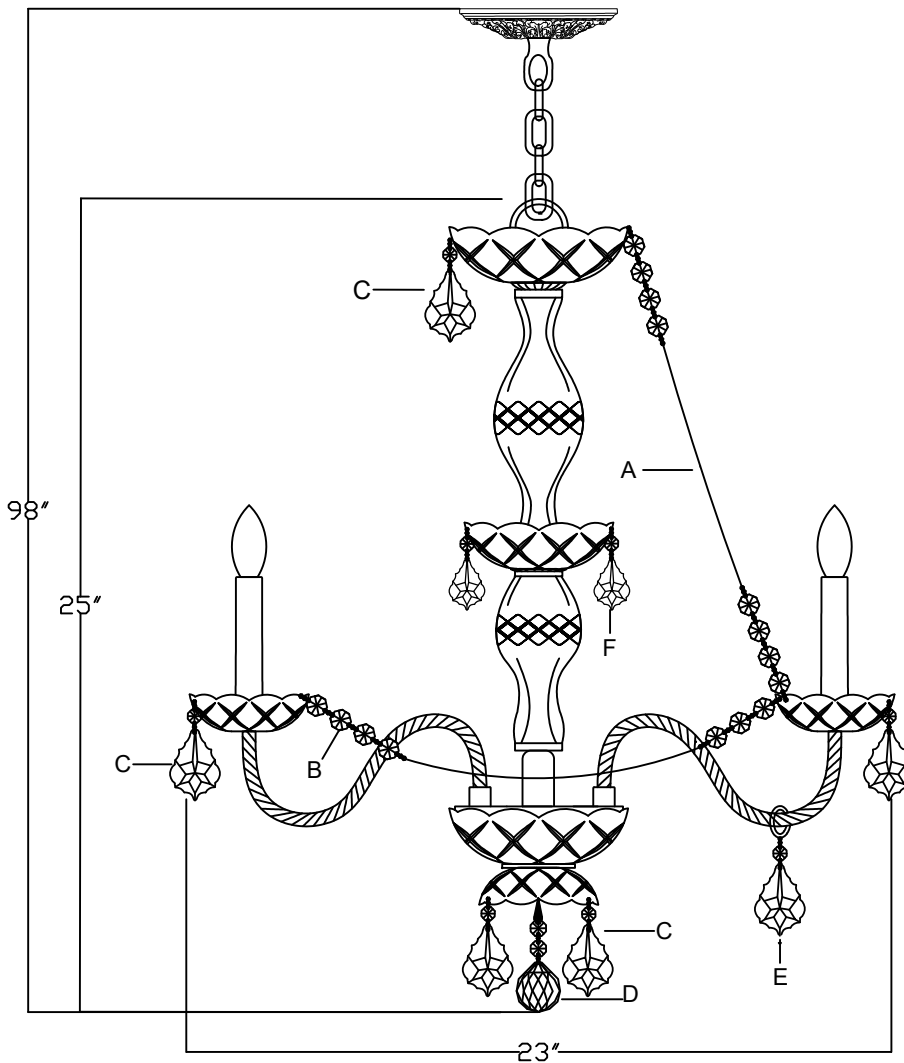

WARNING:
All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 6-Candelabra Base Bulb
40 Watts recommended 60 Watts Max.
USE LED BULBS FOR EXTENDED USE

The fixture is Dry rated


HOW TO INSTALL:

1. Screw the Center column kit onto the distributor box.
2. Place the bottom bowl, check ring, bobèche, check ring, in that order, over the bottom distributor box. Secure with the finial.
3. To install the glass arms, slightly loosen each screw on the top plate over the distributor box. Pull a female plug through a hole in the plate. Connect the male plug at the end of the arm with the female plug that was just pulled. Push the end of the arm with the metal tab through the hole until stopped by the metal tab (this should also push the wires and plugs back inside the metal plate). Twist the metal tab counter-clockwise until both inserts lock onto the loose screws. Tighten the screw securing the arm in place. Repeat for all arms.
4. Attach the mounting bar onto the outlet box.
5. Decide the desired hanging height and adjust the chain to the correct length.
6. Raise the fixture up and do the wire connection. Attach the canopy over the mounting bar and secure with collar ring.
7. Dress the crystals as illustrated.

Crystal Sets

- A. 6 Sets. (18)14mm
- B. 6 Sets. (15)14mm
- C. 41 Sets. (1)14mm+AS20-2"
- D. 1 Piece. (2)14mm + AS8-40mm Ball
- E. 6 Sets. (1)Ring + (1)14mm + AS20-2.5"
- F. 5 Sets. (1)14mm+AS20-2"

DETAILED ILLUSTRATION

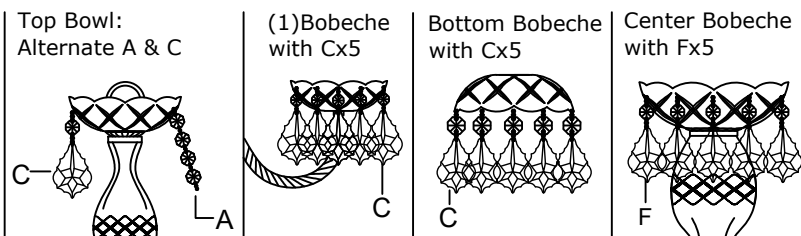


WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.p65warnings.ca.gov

CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL #5086-PB-CL-S

Part Number

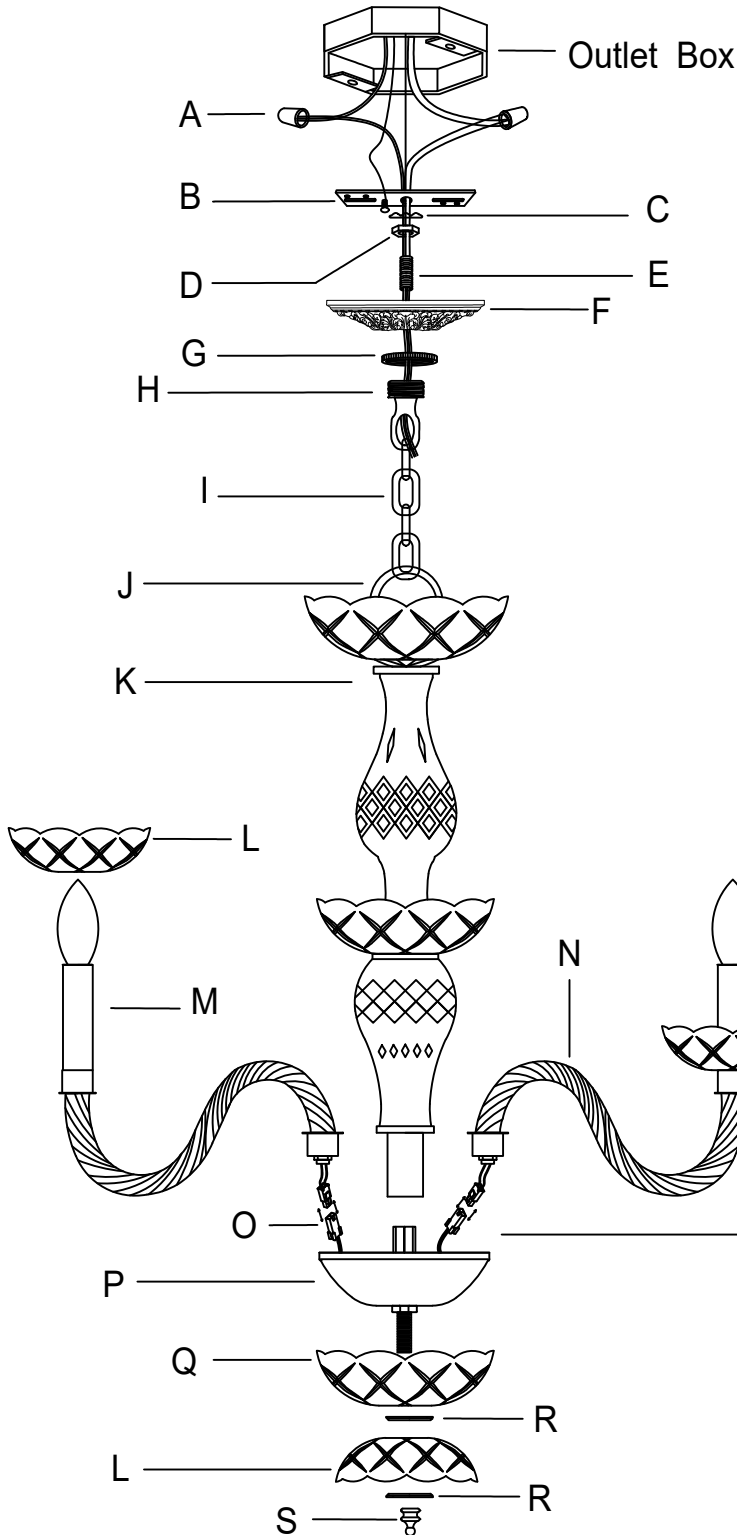

Part Numbers

- A. (2)-Wire Connector
- B. (1)-Mounting Bar
- C. (1)-Lock Washer
- D. (1)-Hex Nut
- E. (1)-Nipple
- F. (1)-Canopy (W5"xH1")-XSN5080PBCAN5IN
- G. (1)-Collar Ring
- H. (1)-Collar Loop
- I. (1)-Chain (4mmx72")-XSN5080PBCHA4MM
- J. (1)-Center Column Kit Loop
- K. (1)-Center Column Kit
 - Top Bowl ; Ø6", 12pin, 14mm center hole.
 - Glass Vase; H8"
 - Center Bobeche ; Ø4", 5pin, 24mm center hole.
 - XSN5080PBBOB5PN
 - Glass Vase; H5"
 - Metal Cover; Ø1", H2"
- L. (7)-Bobeche ; Ø4", 5pin, 24mm center hole.
- XSN5080PBBOB5PN
- M. (6)-PVC Candle Sleeve
- N. (6)-8" Arms with holder-XSN503GDARM8INKD
- O. (6)-Male Plug
- P. (1)-Distributor Box
- Q. (1)-Bottom Bowl ; Ø6", no pin, 14mm center hole.
- R. (2)-Check Ring ; Ø1 3/8"
- S. (1)-Finial-XSN5080PBFIN

