

## Rowan™ High-Efficiency Toilet, 1.6GPF & 1.0GPF

### FEATURES

- Dual-Max® flushing system, high-efficiency (1.6GPF/6.0LPF & 1.0GPF/3.8LPF)
- Round bowl
- Universal Height
- Close coupled, round front bowl and tank set, less toilet seat
- Chrome push-button
- 12" Rough-in

### MODELS

- CST405MF

### COMPONENTS

- C405F - Round Front Bowl
- ST405M - Tank and Cover only
- SS113 SoftClose® seat (sold separately)

### COLORS/FINISHES

- Standard  
#01 Cotton  
#12 Sedona Beige

### PRODUCT SPECIFICATION

The two-piece, universal height, high-efficiency Dual-Max flushing system toilet shall be 1.6GPF/1.0GPF. Toilet shall have high-profile tank, round front bowl and chrome push-button. Toilet shall be WaterSense certified. Toilet shall be TOTO Model CST405MF \_\_\_\_.



**DUALMAX®**  
FLUSHING SYSTEM BY TOTO

### CODES/STANDARDS

- Meets or exceeds ASME A112.19.2/CSA B45.1, ASME A112.19.14
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance



# CST405MF

## Rowan™ High-Efficiency Toilet, 1.6GPF & 1.0 GPF

### SPECIFICATIONS



- Water Use 1.6 GPF & 1.0GPF (6.0 LPF & 3.8LPF)
- Flush System Dual-Max
- Min. Water Pressure 8 psi (flowing)
- Water Surface 7-3/8" x 9-3/8"
- Trap Diameter 1-7/8"
- Rough-in 12"
- Trap Seal 2"
- Warranty One Year Limited Warranty
- Material Vitreous china
- Shipping Weight C405F - 47lbs  
ST405M - 35lbs
- Shipping Dimensions C405F 26-1/2" x 16" x 17"

ST405M 20-1/2" X 8" X 18-3/4"

### INSTALLATION NOTES

#### Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

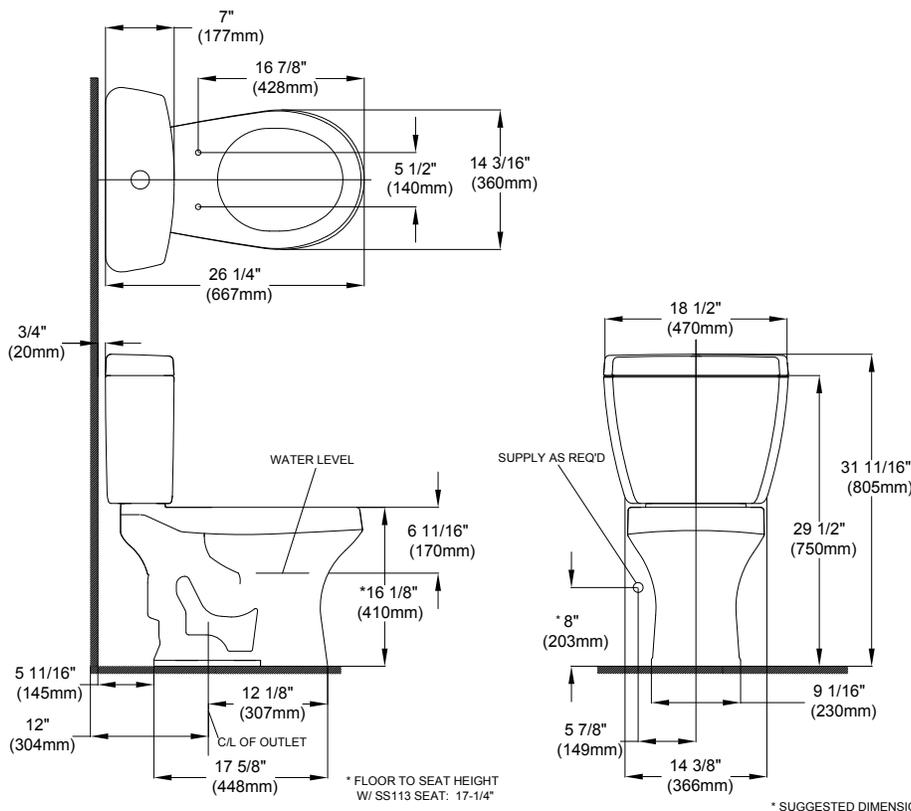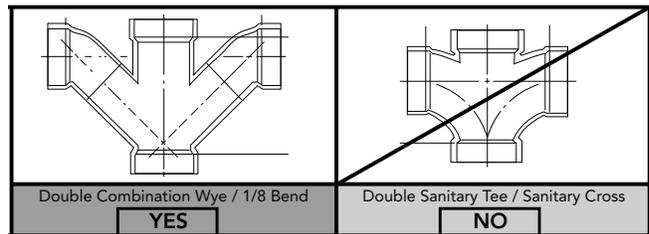

**TOTO**

These dimensions and specifications are subject to change without notice