

## Neorest 550 Elongated Toilet/Bidet

### FEATURES

- Cyclone® siphon jet flushing system, low consumption (1.05GPF/4.0LPF and 1.6GPF/6.0LPF)
- SanaGloss® ceramic glaze - SanaGloss glaze prevents debris, and mold from sticking to ceramic surfaces, leading to fewer chemicals and less water in cleaning.
- Auto lid open/close, auto flush
- Convenient remote control
- Adjustable heated seat
- Adjustable spray position
- Washlet with three wash modes (front, rear, soft)
- Oscillating and pulsing comfort washing
- Energy saver timer
- Built-in air purifying system

### MODELS

- MS980CMG  
With SanaGloss ceramic glaze

### COLORS/FINISHES

- #01 Cotton
- #11 Colonial White
- #12 Sedona Beige

### PRODUCT SPECIFICATION

The Neorest 550 uses our Cyclone flushing system toilet shall be 1.02GPF/4.0LPF and 1.6GOF/6.0LPF. Toilet shall have SanaGloss ceramic glaze. Toilet shall be of skirted design, elongated front bowl with auto open and close seat. Toilet shall be TOTO Model MS980CMG\_\_\_\_\_.



**SanaGloss**

**CYCLONE®**  
FLUSHING SYSTEM BY TOTO

### CODES/STANDARDS

- Meets and exceeds ASME A112.4.2, ASME A112.19.2/CSA B45.1, ASME A112.18.1/CSA B125.1, UL 1431, CSA C22.2 # 68
- Certifications: IAPMO(cUPC), Intertek, State of Massachusetts, City of Los Angeles and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others





# MS980CMG

## Neorest 550 Elongated Toilet/Bidet

### SPECIFICATIONS

Water Use:	1.6 Gpf/6.0 Lpf with alternate 1.05 Gpf/4.0 Lpf
Flush System:	Cyclone Siphon Jet
Water Supply:	Min 8.7gal/min (33L/min) before installation Max 80PSI (0.55MPa) static
Water Surface:	10-13/16" x 8-7/16"
Trap Diameter:	2-1/8" (54 mm)
Rough In:	12" rough in Warning: If there is a base board in the restroom, the center of the floor drain should be a minimum of 12" from the base board.
Trap Seal:	2-7/16" (62 mm)
Warranty:	Three Year Limited (Residential) One Year Limited (Commercial)
Material:	Bowl: Vitreous china Seat and cover: Plastic
Shipping Weight:	112 lbs.
Shipping Dimensions:	21" x 31" x 34"
Accessories:	Sound Experience - THU9201 Connection Unit - THU9202#XX

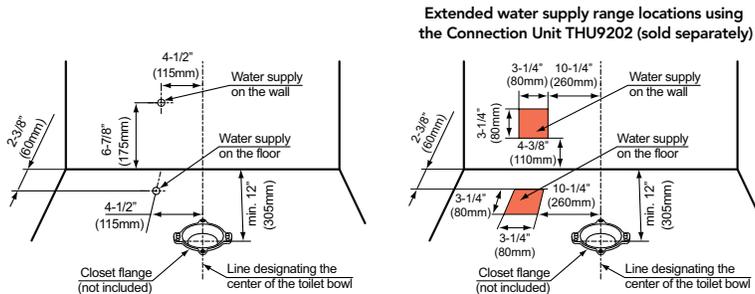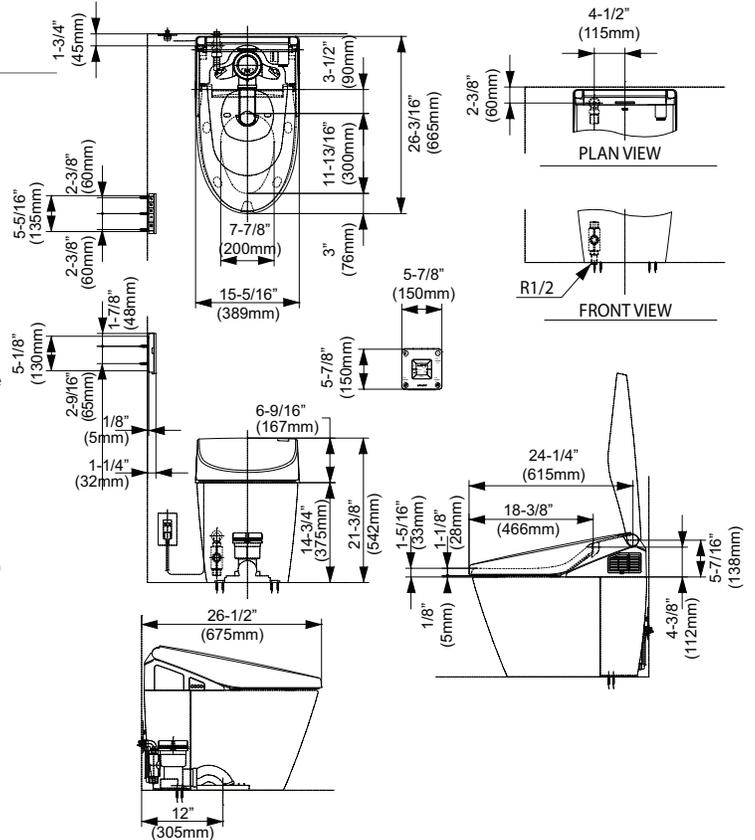

Power Rating	120V AC, 60 Hz.1284W
Power Cord	Maximum length: 3 ft (914 mm)
Water Feature	Adjustable Water Flow Rate Rear washing: from 9.1 to 14.5 oz/min. Soft washing: from 9.1 to 14.5 oz/min. Front washing: from 9.8 to 14.5 oz/min.  Temperature of Washing Spray Minimum: 86° F/30° C Maximum: 104° F/40° C  Safety Features: Temperature fuse, Bi-metal sensor (auto reset), and Float switch (prevent boil)
Drying Feature	Air Temperature: High: About 138°F/59°C Medium: About 122°F/50°C Low: About 104°F/40°C  Capacity of Air: 10.6 ft³/min Safety Feature: Temperature Fuse

Seat Warming Feature	Surface Temperature: Minimum: 82° F/28° C Maximum: 97° F/36° C  Seat Heater Capacity: 50W Safety Feature: Thermal fuse
Air Purifying Feature	Method: 0 Deodorizer Air Volume: 5.5 ft³/min
Ambient Temperature Range	33°F/1°C to 104°F/40°C
Size	15.3" x 25.2" x 21.3"
Weight	Net: 82.7 lbs.



These dimensions and specifications are subject to change without notice