



41180 Raintree Court // Murrieta, CA 92562 // 1-888-304-0660

30101 Filtration System

The Waterstone 30101 Filtration system features a single cartridge multi-stage replaceable filter. The first stage is a 20 micron pre-filter, followed by the second stage 5-micron pre-filter, with a final stage GAC (Granular Activated Carbon) filter.

This unit meets the requirements for NSF 42 & 53. The 30101 system is rated at 1000 gallons providing exceptional filtration capacity and effectively reducing chlorine, VOCs (Volatile Organic Compounds), bad taste and odor from your municipal drinking water.

We have put together a quick and easy reference chart below to help you see just how much of what we can commonly find in our drinking water can be handled by this multi-stage GAC filtration system. This system is effective, economical, and a perfect accessory with your Waterstone Hot & Cold or cold only drinking water faucet.

| | | | | | |
|----------------------|---|---------------------|---|------------------------|---|
| Acetaldehyde | 4 | Ethyl Chloride | 4 | Ozone | 4 |
| Acetone | 4 | Ehtyl Ether | 4 | PCBs | 5 |
| Amines | 3 | Gasoline | 5 | Pesticides | 5 |
| Amyl Acetate | 5 | Heavy Metals | 3 | Phenol | 5 |
| Benzene | 5 | Herbicides | 5 | Plastic Taste | 5 |
| Bleach | 5 | Hydrogen Peroxide | 5 | Potassium Permanganate | 4 |
| Bytly Alcohol | 5 | Insecticides | 5 | Propionaldehyde | 3 |
| Butly Acetate | 5 | Isopropyl Acetate | 5 | Propyl Acetate | 4 |
| Calcium Hypochlorite | 5 | Ketones | 5 | Propyl Chloride | 4 |
| Chloral | 5 | Lead | 3 | Radon | 4 |
| Chloramine | 4 | Mercaptans | 4 | Rubber Hose Taste | 5 |
| Chloroform | 5 | Methyl Acetate | 4 | Sodium Hypochlorite | 5 |
| Chlorine | 5 | Methyl Bromide | 5 | Solvents | 4 |
| Clorobenzene | 5 | Methyl Chloride | 4 | Sulphonated Oils | 4 |
| Chlorophenol | 5 | Methyl Ethyl Ketone | 5 | Tar Emulsion | 4 |
| Chlorophyll | 4 | Naphtha | 5 | Taste from Organics | 4 |
| Cresol | 5 | Nitrobenzene | 5 | THMs | 5 |
| Defoliant | 5 | Nitrotoluene | 5 | Toluene | 5 |
| Diesel Fuel | 5 | Odors | 5 | Toluidine | 5 |
| Ethyl Acetate | 5 | Oil - Dissolved | 5 | Trichlorethylene | 5 |
| Ethyl Acrylate | 5 | Oil - Suspended | 2 | Turpentine | 5 |
| Ethyl Amine | 4 | Organic Esters | 5 | Xylene | 5 |


5 - EXCELLENT - proven effective 4 - VERY GOOD - proven effective
 3 - GOOD - very acceptable results 2 - FAIR - limited application 1 - POOR - not recommended





41180 Raintree Court // Murrieta, CA 92562 // 1-888-304-0660

30101 Filtration System

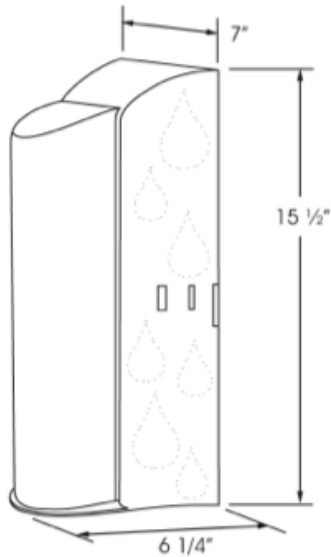

Meets the following:

- NSF

Technical Specifications:

- 1000 Gal Filtration System.
- Single Cartridge Multi-Stage Filter.
 - 1st Stage Filter - 20 Microns
 - 2nd Stage Filter - 5 Microns
 - 3rd Stage Filter - GAC
- Dimensions: 7" W x 6 1/4" D x 15 1/2" H.
- Unit Weight: 4.75 lbs.
- For municipal potable feed water use only.
- Feed water press. range: 40 psi to 100 psi max.
- Feed water temp. range: 32F to 120F max.
- Includes attachment tubing already connected.
- Made to work with WS-300 Safety Valve.
- Manufactured by Nimbus Inc, and Distributed by Waterstone Faucets.
- Manufacturer provided One Year Warranty.

