

TRADITIONAL PLP EXTENDED REACH PULLDOWN FAUCET SPECS

Model # 5500




PRODUCT DESCRIPTION

- Compatible with Reverse Osmosis filtration systems.
- Unique "PLP" positive lock holds spray head in place.
- Spray head extends 18" from spout.
- Pre-positioned "Easy Pull" counterbalanced weight.
- Select lever spray or aerated stream.
- 1.75 gpm maximum flow rate when aerated stream is selected.
- Solid brass construction.
- Spout swivels 360 degrees.
- Single lever control with Hot/Cold ceramic disk valve cartridge.
- Handle adjusts 22.5 degrees in either direction for backsplash clearance.
- Adjustable PTFE "Friction Lock" helps handle feel and prevents
- Includes 3 handle button options. Finish match, ceramic Hot/Cold indicator and ceramic Cold/Hot indicator.
- Reinforced braided connection hoses.

CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- ASME A112.18.1
- CSA B125.1
- NSF 61, 372
- CALGreen

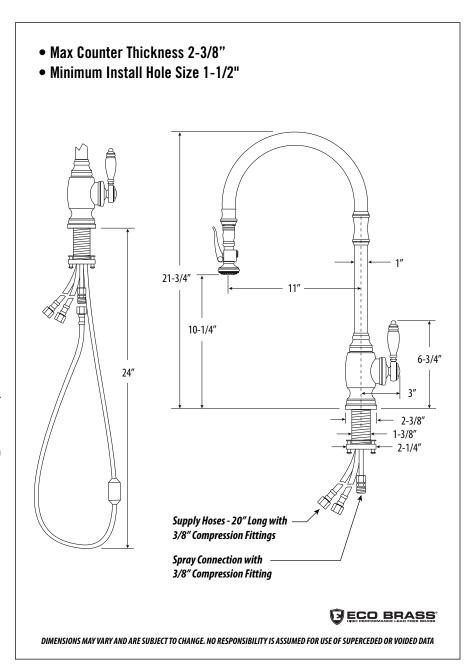

AVAILABLE IN 32 FINISHES + SOLID STAINLESS STEEL

Almond - 01 Antique Brass - AB Antique Bronze - ABZ Antique Copper - AC American Bronze - AMB Antique Pewter - AP Black - 06 Black Nickel - BLN Black-Oil Rubbed Bronze - ORB Biscuit - 07 Caribbean Bronze - CB Chocolate Bronze - CHB Chrome - CH

Distressed Antique Brass - DAB

Distressed Antique Copper - DAC
Distressed American Bronze - DAMB
Distressed Antique Pewter - DAP
Euro-White - EW
Matte Black - MB
Polished Brass - PB
Polished Copper - PC

Polished Gold - PG Polished Nickel - PN Satin Chrome - SC Satin Gold - SG Satin Nickel - SN Stainless Steel - SS* Tuscan Brass - TB Unlaquered Polished Brass - UPB Venetian Bronze - VB Weathered Brass - WB Weathered Copper - WC White - WT