
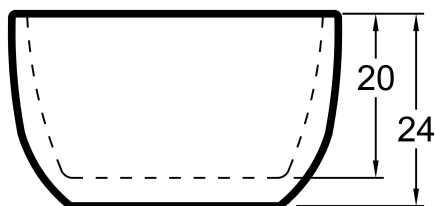
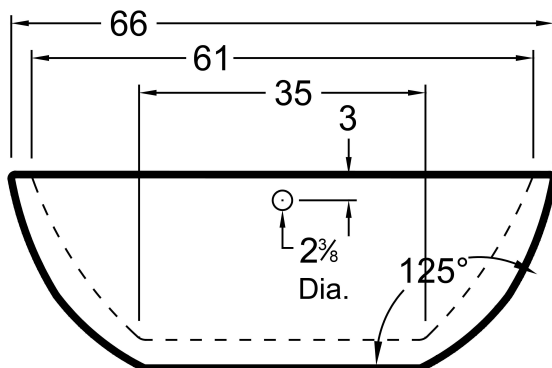


# AMERICH®

## CONTURA II 6640

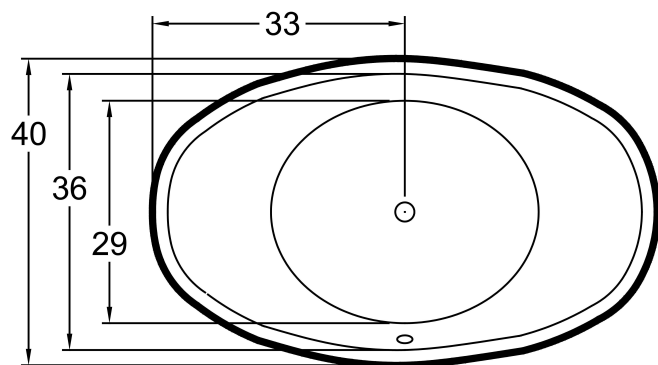

### DIMENSIONS

66 x 40 x 24 deep (1676 x 1016 x 610 mm)

Gallon to Overflow = 85 (Liters = 322)

Factory installed integral drain.

### MATERIAL

Acrylic

### TUB FLOOR

Non-Textured

### UNDERMOUNT: NO

This tub is not designed for undermount installation.

### APPROVALS & COMPLIANCE



Americh products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories - Canada (cUL)
- ANSI Z124.1 • ANSI A112-19.7
- ANSI A112.19.8

Contact Americh for additional approvals.

## LEGEND



Blower




ON/OFF Control



Access Panel



MFG IDLabel

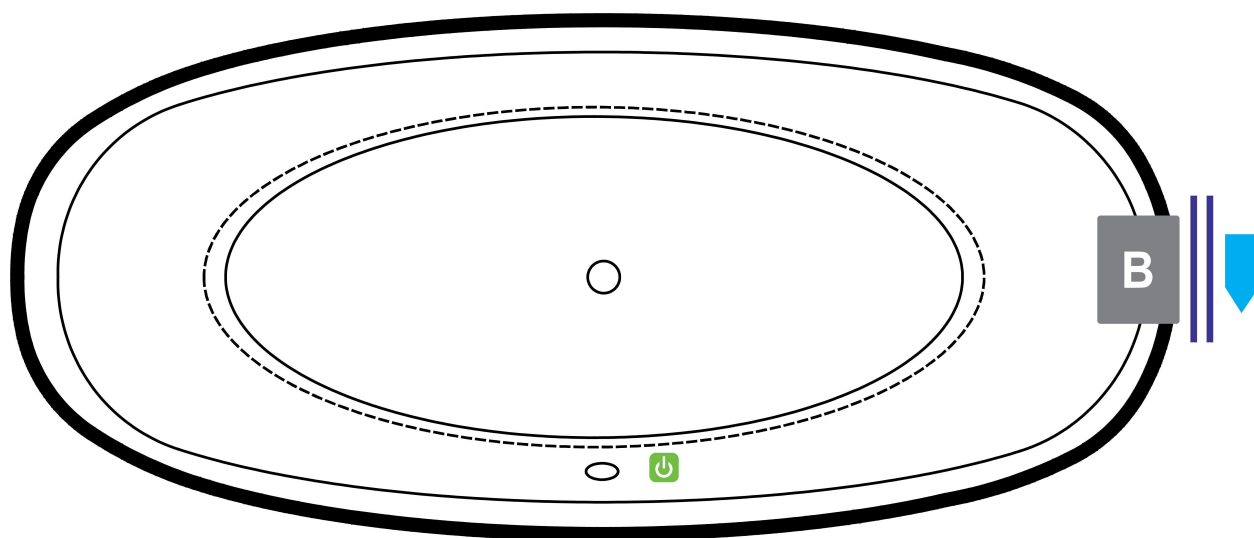

### Airbath System II

Factory installed blower may only be placed in this location.

## STANDARD EQUIPMENT

- Integral Waste & Overflow
- Lift Bag Included

## OPTIONAL ACCESSORIES

- Color Upcharge
- Matte White Acrylic Upgrade
- Chromatherapy \*
- Drop-in Drain Kit
- Pillows: 12" \*
- Trim Plate for Linear Overflow

## INSTALLATION TIPS

- Install according to Owner's Manual and local codes.
- Always consult your local plumber for recommendations as installations will vary.
- The bath must be secured to the floor by applying a bead of silicone around the base (which can be cut in future should there be a need to access to the plumbing).
- Installation must be carried out according to the manufacturer instructions.
- Hot water supply should be 65-75% of tub capacity or greater.

## ELECTRICAL REQUIREMENTS

Americh recommends one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.