

artos[®]

F907-43

INSTALLATION GUIDE

multi-function shower head,
wall mount, angled arm round

BRUSHED NICKEL(BN)



CHROME(CH)



BLACK (BK)



SATIN BRASS (SB)



artos[®]

F907-43

multi-function shower head,
wall mount, angled arm round

OPERATING SPECIFICATIONS



FEATURES

3-functions

OPERATING PRESSURE

Minimum: 15 psi

Maximum: 75 psi

Above 90psi it may be necessary to install a pressure reducer

OPERATING TEMPERATURE

Maximum: 176°

FLOW RATE

1.8 USGPM

APPROVALS





artos[®]

F907-43

PRODUCT DIMENSIONS

multi-function shower head,
wall mount, angled arm round

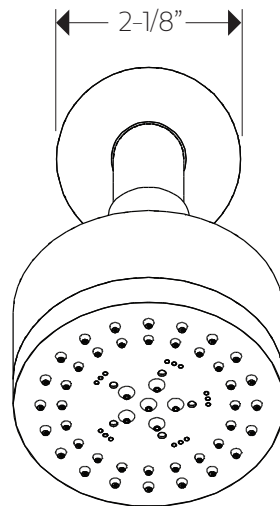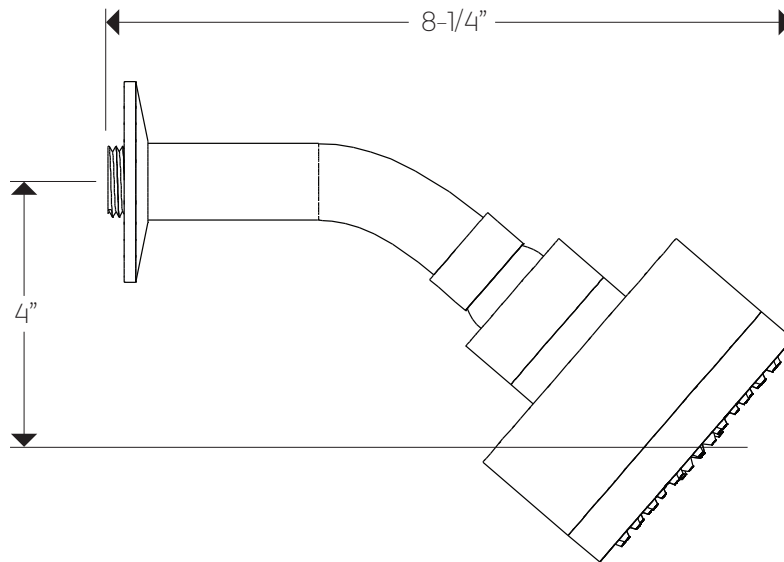


artos[®]


F907-43

multi-function shower head,
wall mount, angled arm round

STEP 1

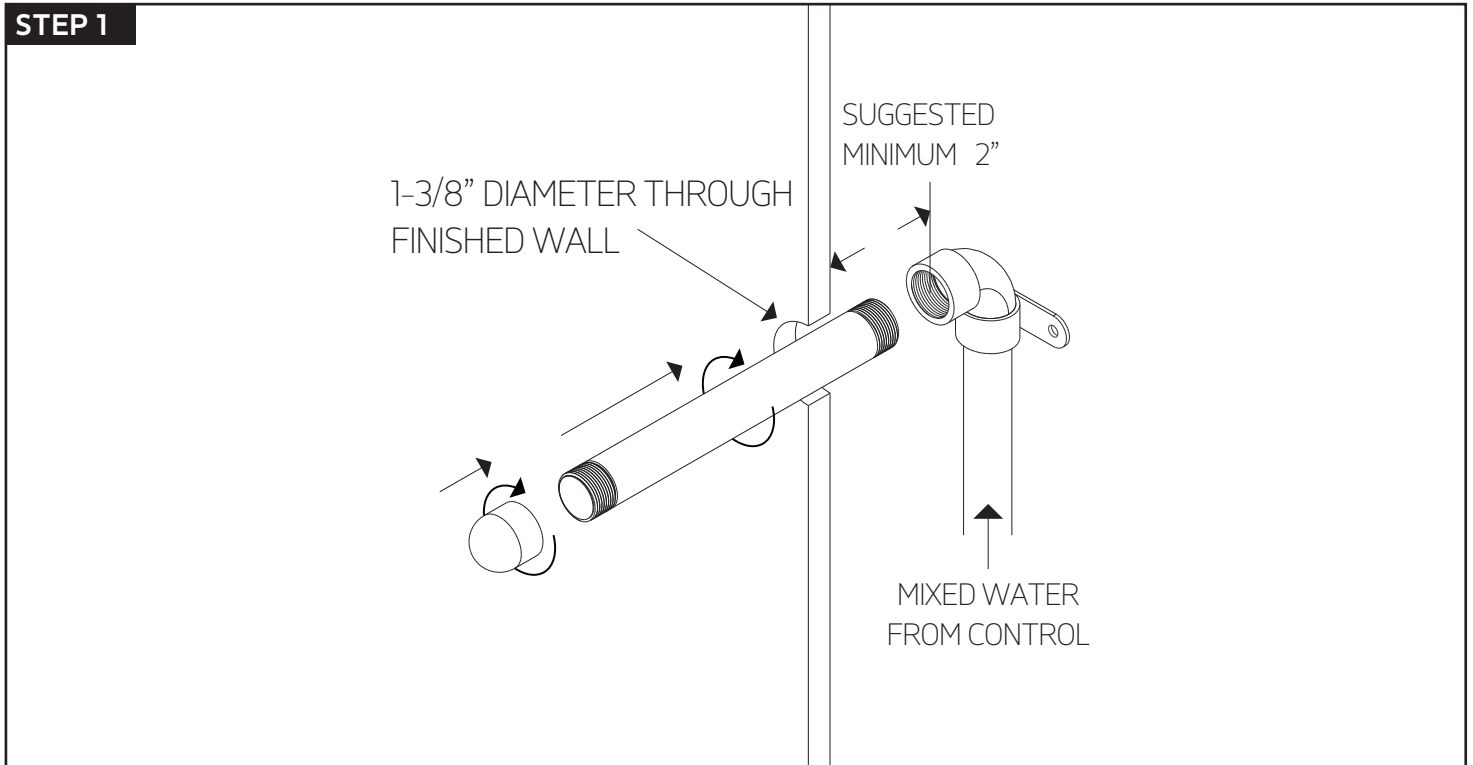


STEP 2

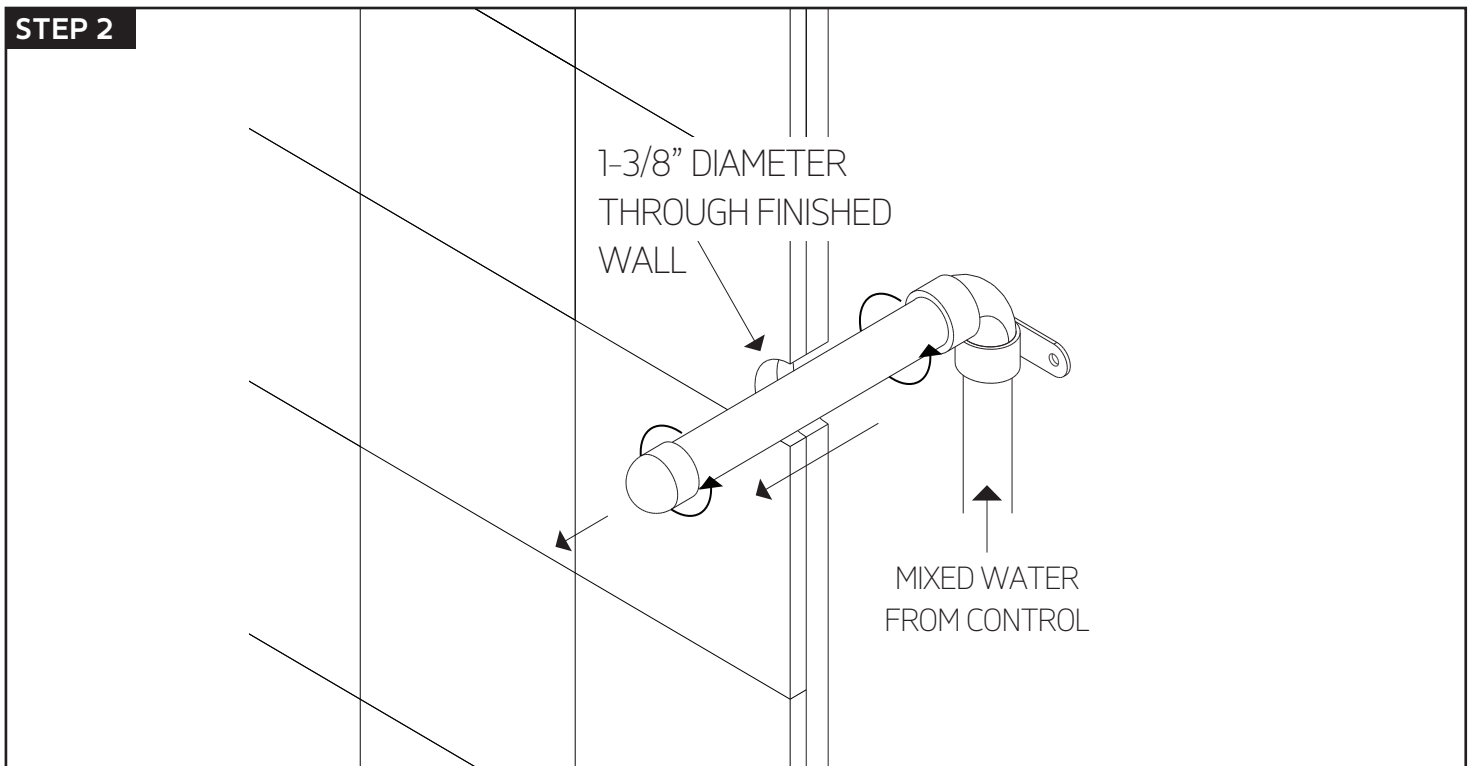


INSTALLATION STEPS

STEP 3

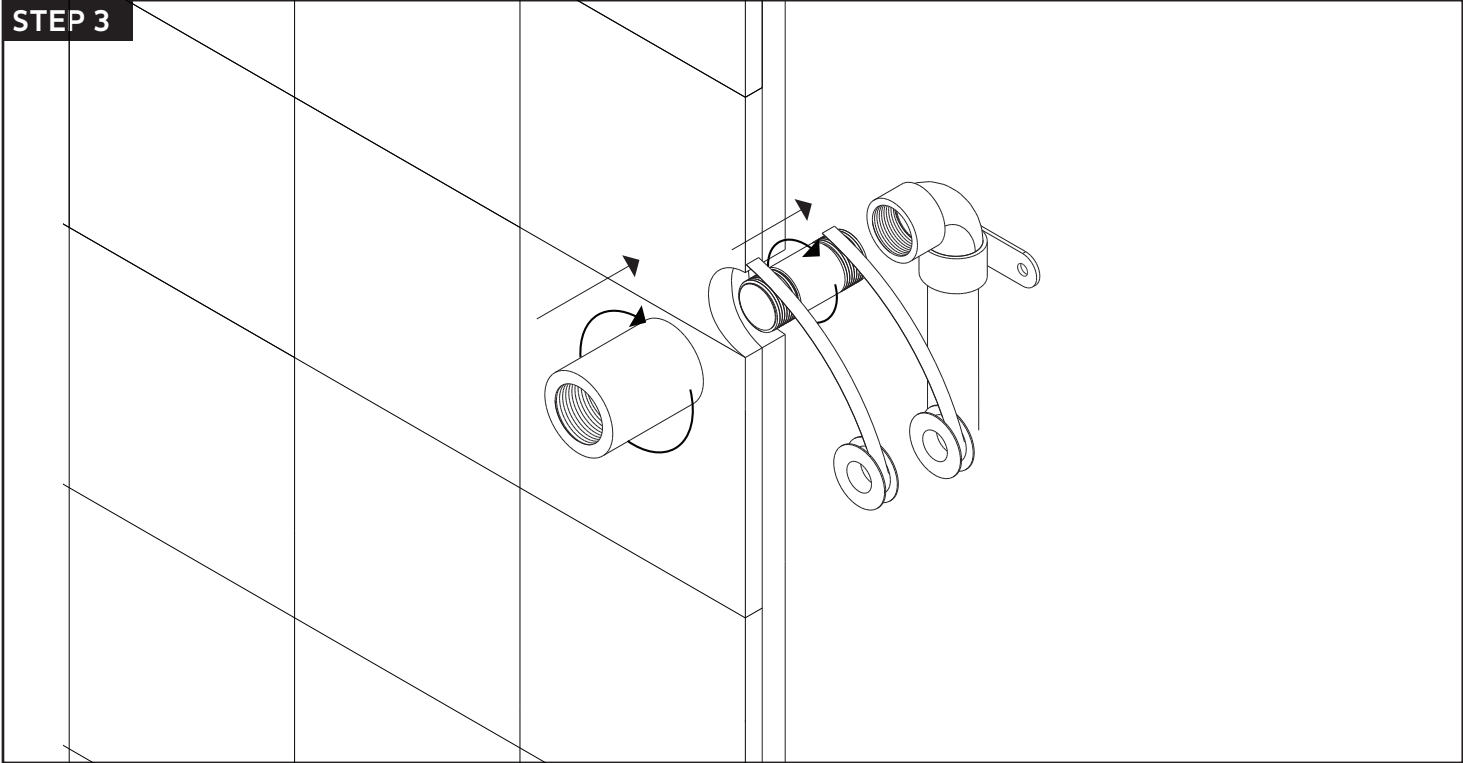

STEP 4

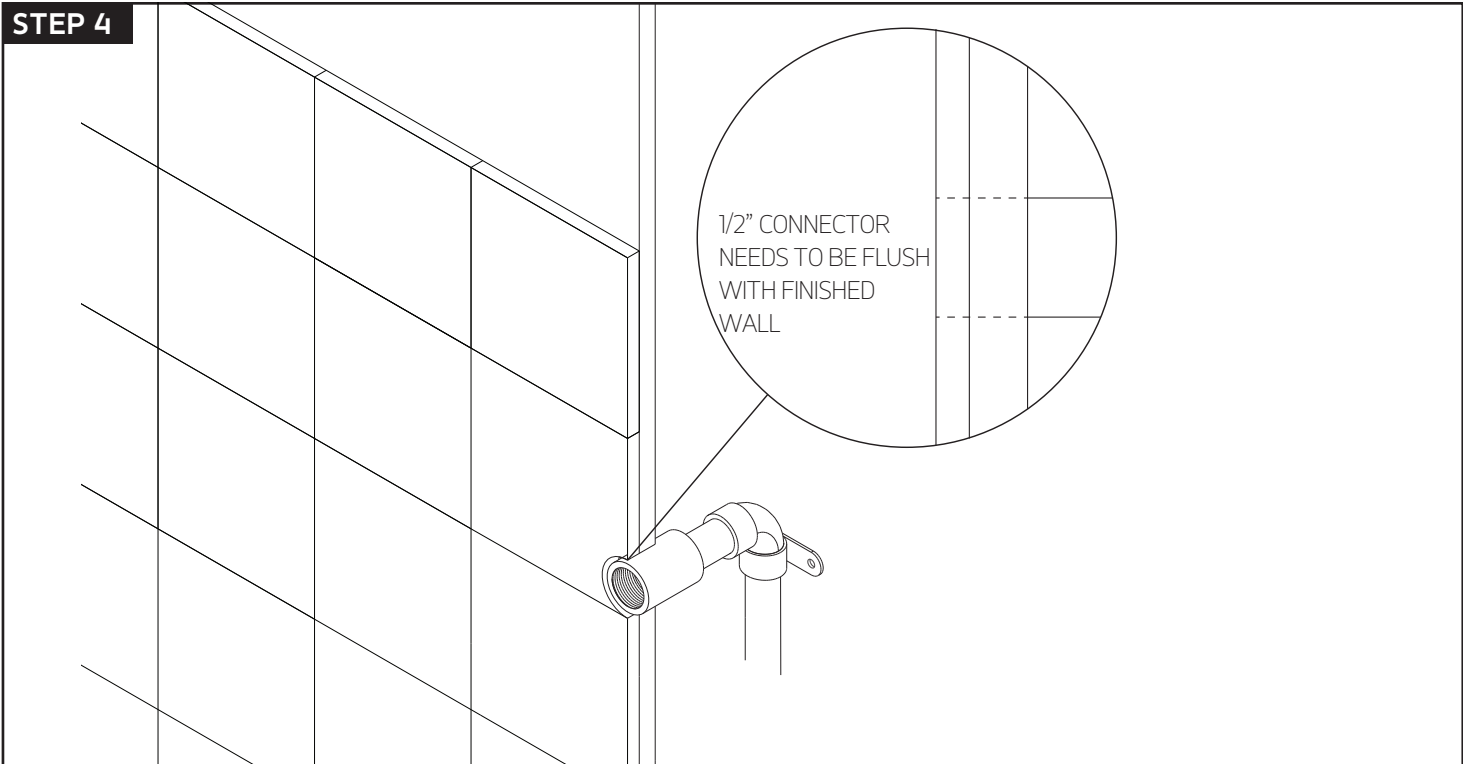


artos[®]

F907-43


INSTALLATION STEPS

multi-function shower head,
wall mount, angled arm round


STEP 5

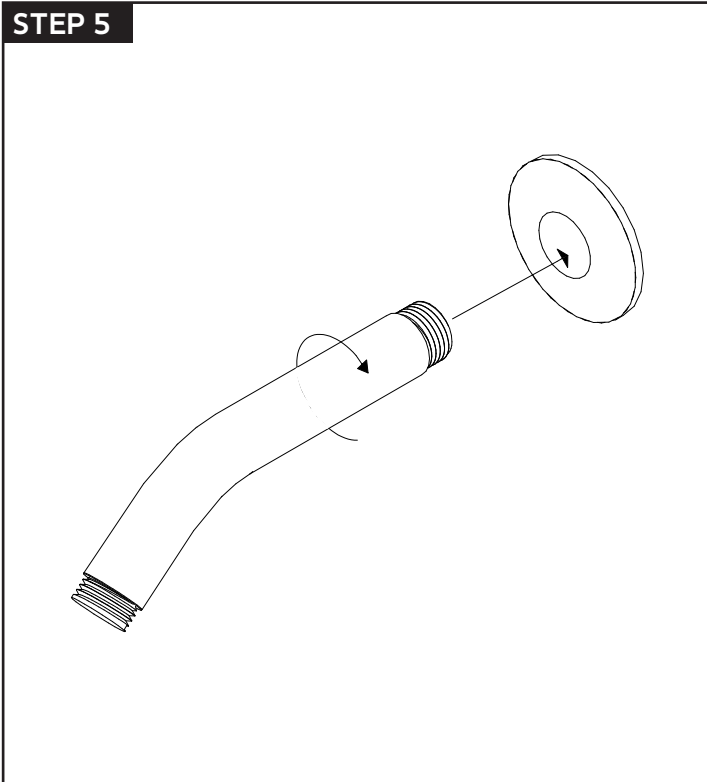

STEP 6

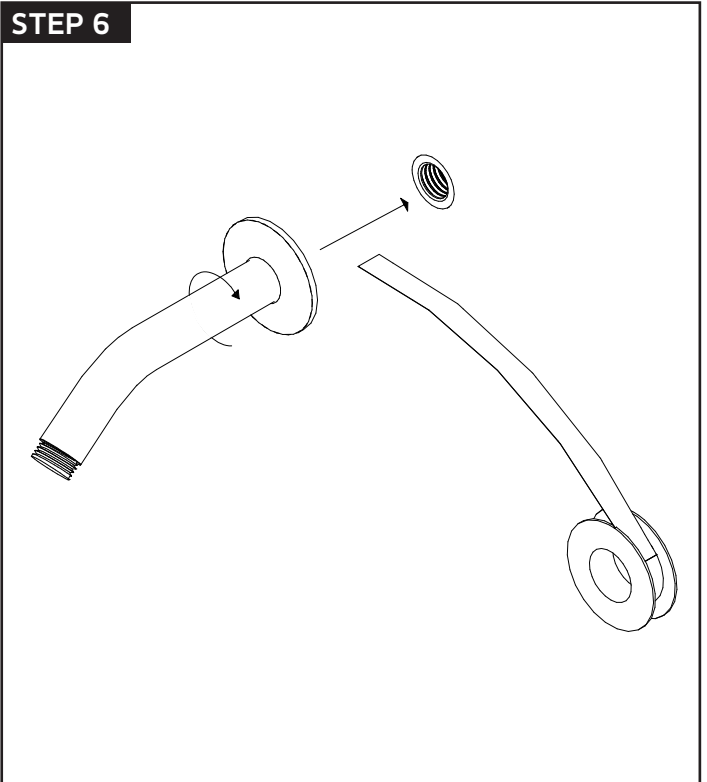

STEP 7

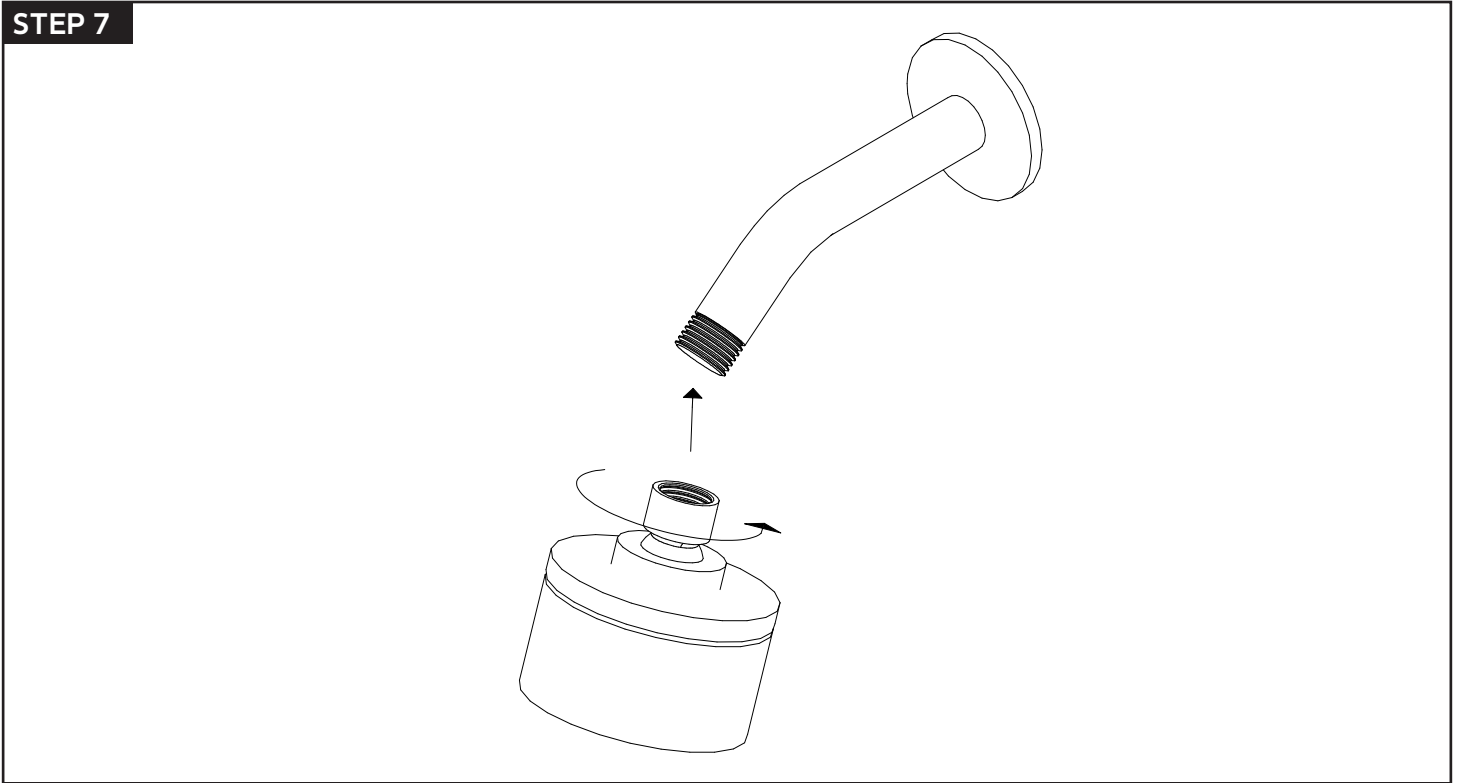


artos[®]

F907-43

PARTS BREAKDOWN

multi-function shower head,
wall mount, angled arm round

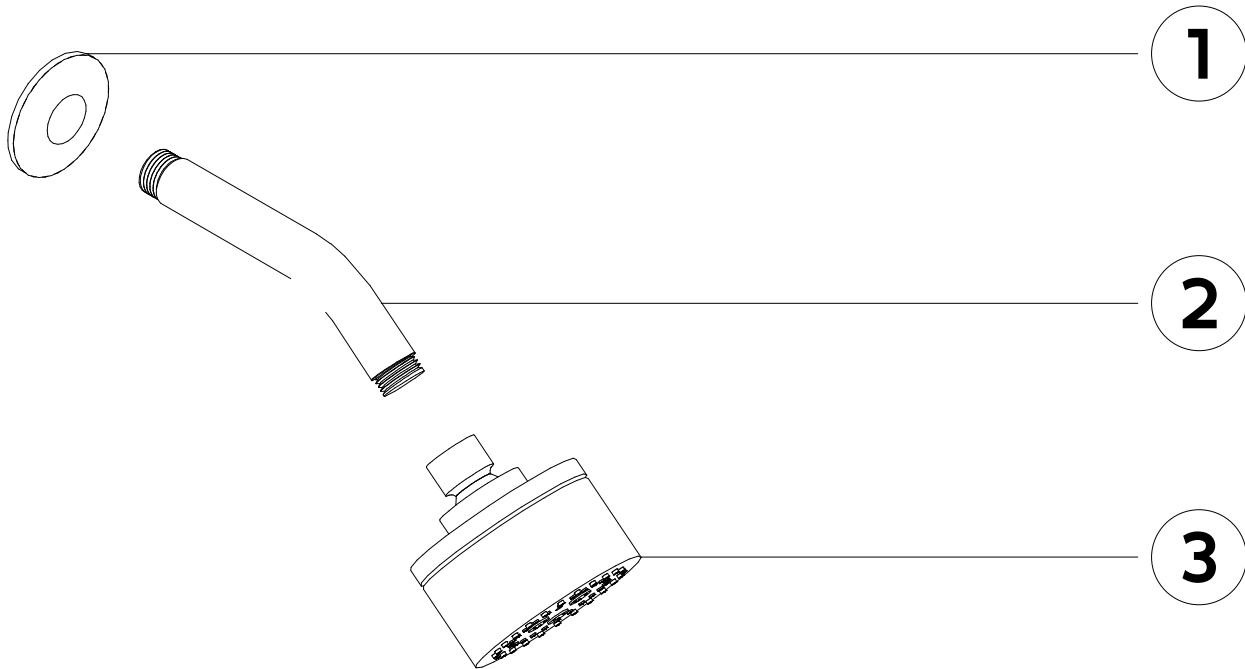

- 1** SHOWER ARM ESCUTCHEON
- 2** SHOWER ARM
- 3** SHOWER HEAD