
# CRYST RAMA

LIGHTING THE WAY FOR SIXTY YEARS

#### ASSEMBLY INSTRUCTION MODEL #4473-GD-CL-SAQ\_CEILING



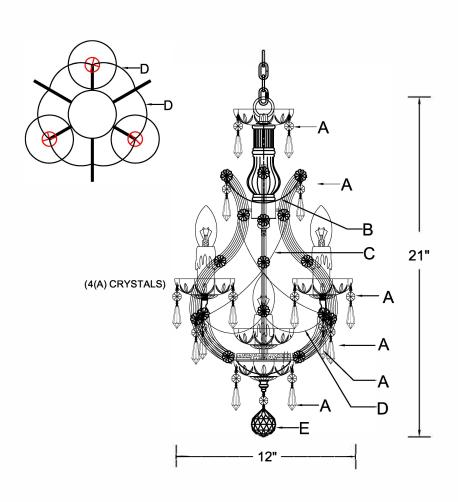

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 4-Candelabra Base Bulb
40 Watts Recommended 60 Watts Max
USE LED BULBS FOR EXTENDED USE

The fixture is dry rated

## How to Install


 Do a complete inventory of all parts and components before you start installing.

#### For Hanging.

Screw the long threaded pipe onto the top of fixture.Slide the long glass column, check ring and top dish over the glass column and secure with fixture loop.


# For Ceiling.

- Screw the short threaded pipe onto the top of fixture.Slide the short glass column, check ring and canopy over the glass column and secure with hex nut.
- Put the bottom dish and small metal dish over the bottom metal cover and secure with the finial
- 4. When you begin to dress the fixture, start with packet labeled (A).
- 5. IMPORTANT: Apply crystal sets in alphabetical order.



For Ceiling.

### **DETAILED ILLUSTRATION**



# **Crystal Sets**

A. 29Sets. (1)14mm + 38mm

B. 3Sets. (7)14mm

C. 6Sets. (12)14mm

D. 6Sets (8)14mm


E. 1Piece. (1)14mm + AS8-40mm Ball

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov

# CRYST RAMA

# LIGHTING THE WAY FOR SIXTY YEARS

### ASSEMBLY INSTRUCTION MODEL #4473-GD-CL-SAQ\_CEILING

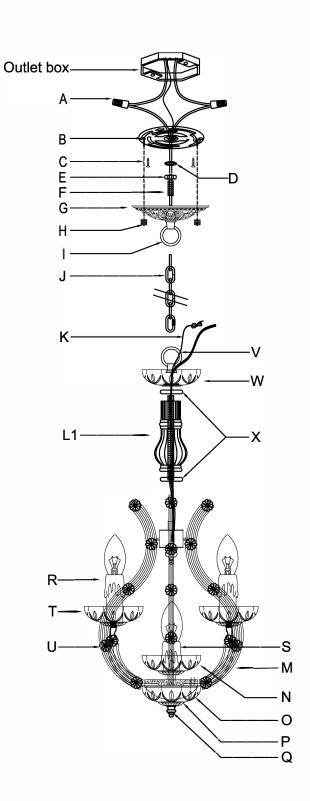

# Part Number

#### **Part Numbers**

- A. (2)-Wire Connector
- B. (1)-Mounting Plate
- C. (2)-Outlet Box Screws
- D. (1)-Lock washer
- E. (1)-Hex Nut
- F. (1)-Nipple
- G. (1)-Canopy; w5" x h1" (XFB4430GDCAN5IN)
- H. (2)-Ball Nut (XFB4430GDBANUT)
- I. (1)-Collar Loop
- J. (1)-Chain; 72", 4mm (XFB4405GDCHA4MM)
- K. (1)-Ground Wire
- L1. (1)-Column
- L2. (1)-Shorter glass column
- M. (1)-Frame
- N. (1)-Dish; Ø4", 26mm hole (XFB4473DIBOB4IN)
- O. (1)-Bottom Dish; Ø4", 17mm hole, 4pin (XFB4473GDDIBOB4IN)
- P. (1)-Small Metal Dish
- Q. (1)-Finial (XFB4405GDFIN)
- R. (3)-Candle Sleeve; h3" (XFB4405CDL3IN)
- S. (1)-Candle Sleeve; h2" (XFB4409CDL2IN)
- T. (4)-Bobeche; Ø4", 26mm hole, 4pin (XFB4405GDBOB4IN)
- U. ()-Rosette
- /. (1)-Fixture loop
- W. (1)-Top Dish; Ø4", 13mm hole, 4pin (XFB4473GDDIBOB4IN)
- χ. (2)-Check ring

PART BAG I : Includes Parts A. C

PART BAG II: Includes Parts B, D, E, F, G, H, I

For Ceiling.

