



CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS
ASSEMBLY INSTRUCTION MODEL #6828-CH-CL-MWP

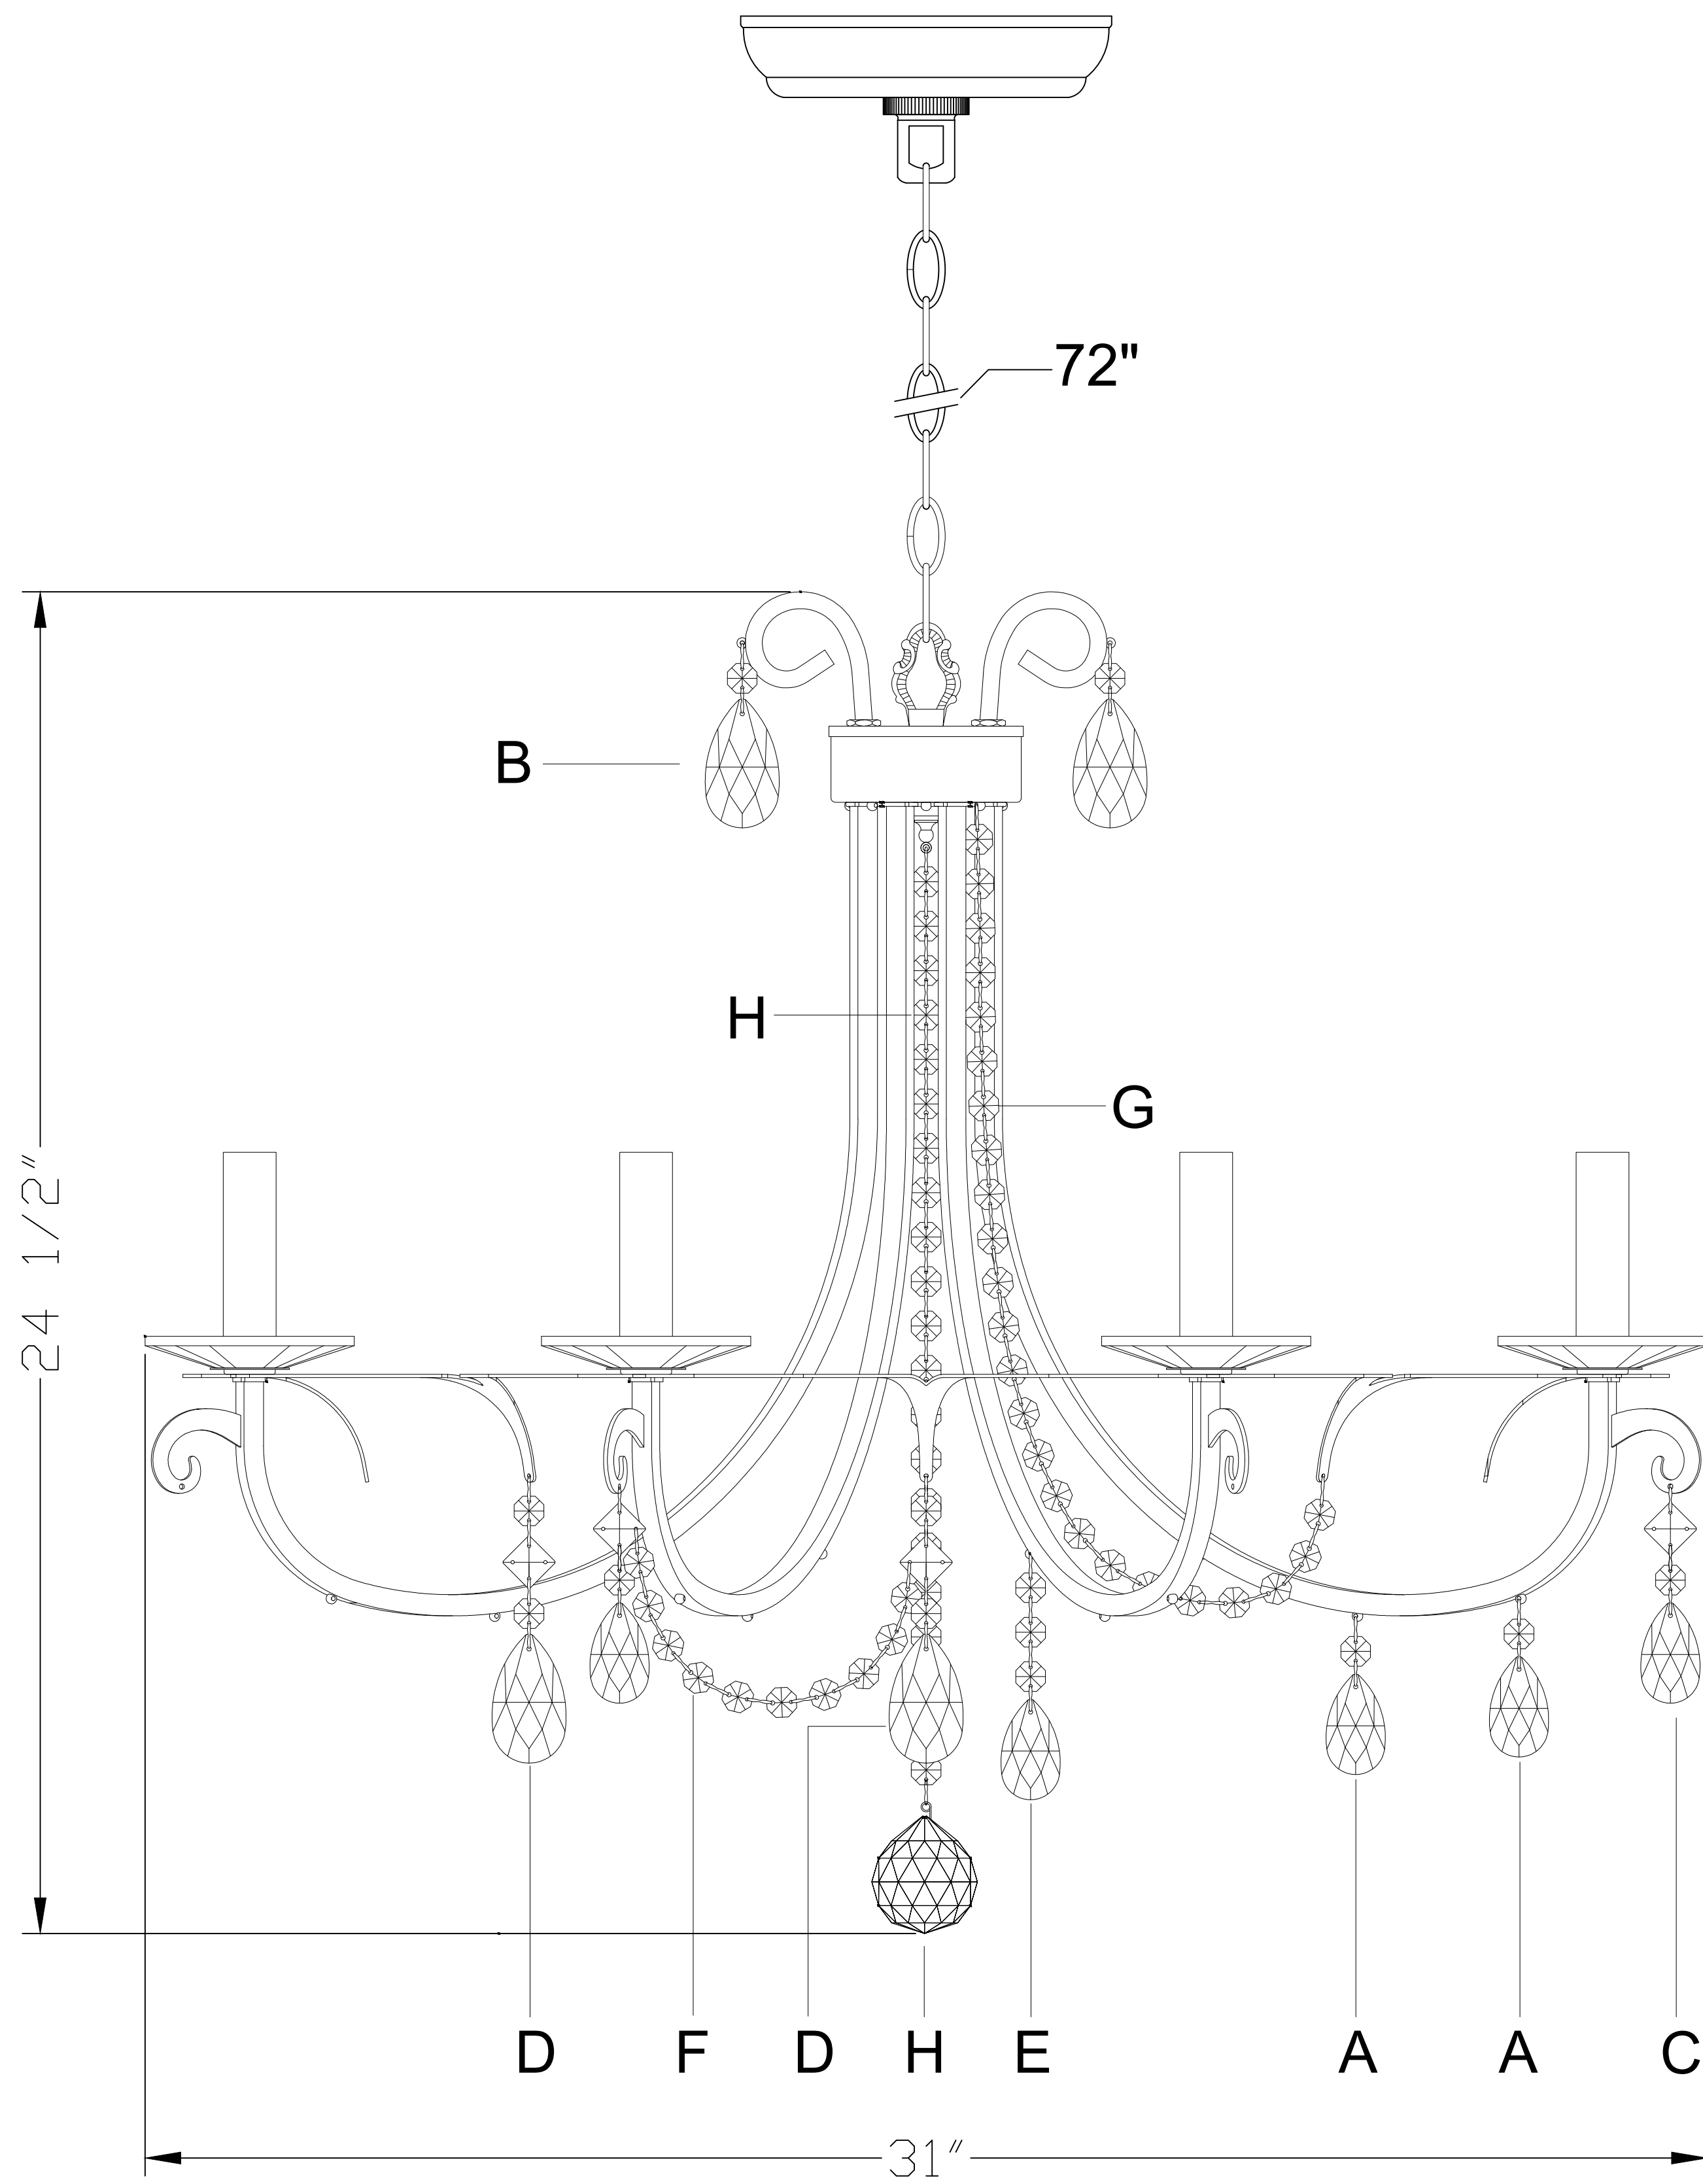

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.

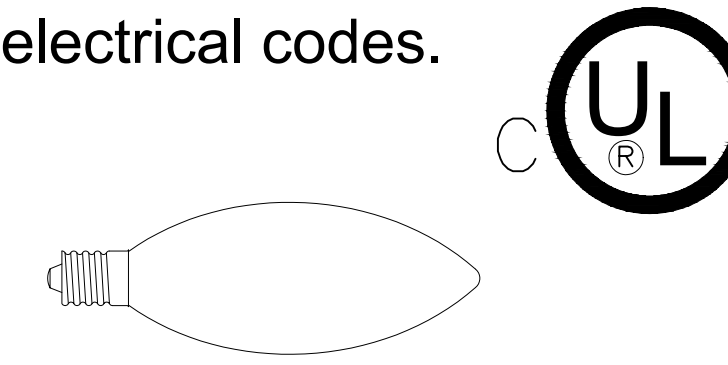

You will need 8-Candelabra Base Bulb

40Watts Recommended 60 Watts Max.


USE LED BULBS FOR EXTENDED USE

The fixture is damp rated

How to Install

Place the fixture on a soft cloth covered table during the assembly.

1. Place the top assembly over the frame and secure with the loop
2. Space the arms out equally.
3. Insert one section of the scroll ring in between two adjacent sockets. (making sure the indent fits over the threaded nipple) and seat it underneath the metal washer on the socket. Repeat for all sections of the scroll ring.
4. After all the sections of the scroll ring are inserted underneath the sockets, secure in place by tightening a hex nut using the provided wrench.
5. Place the candle sleeve and crystal bobèche over the socket.
6. After safely attaching the fixture into outlet box, install bobèches, bulbs and proceed to connecting the power
7. Dress the crystals as illustrated.

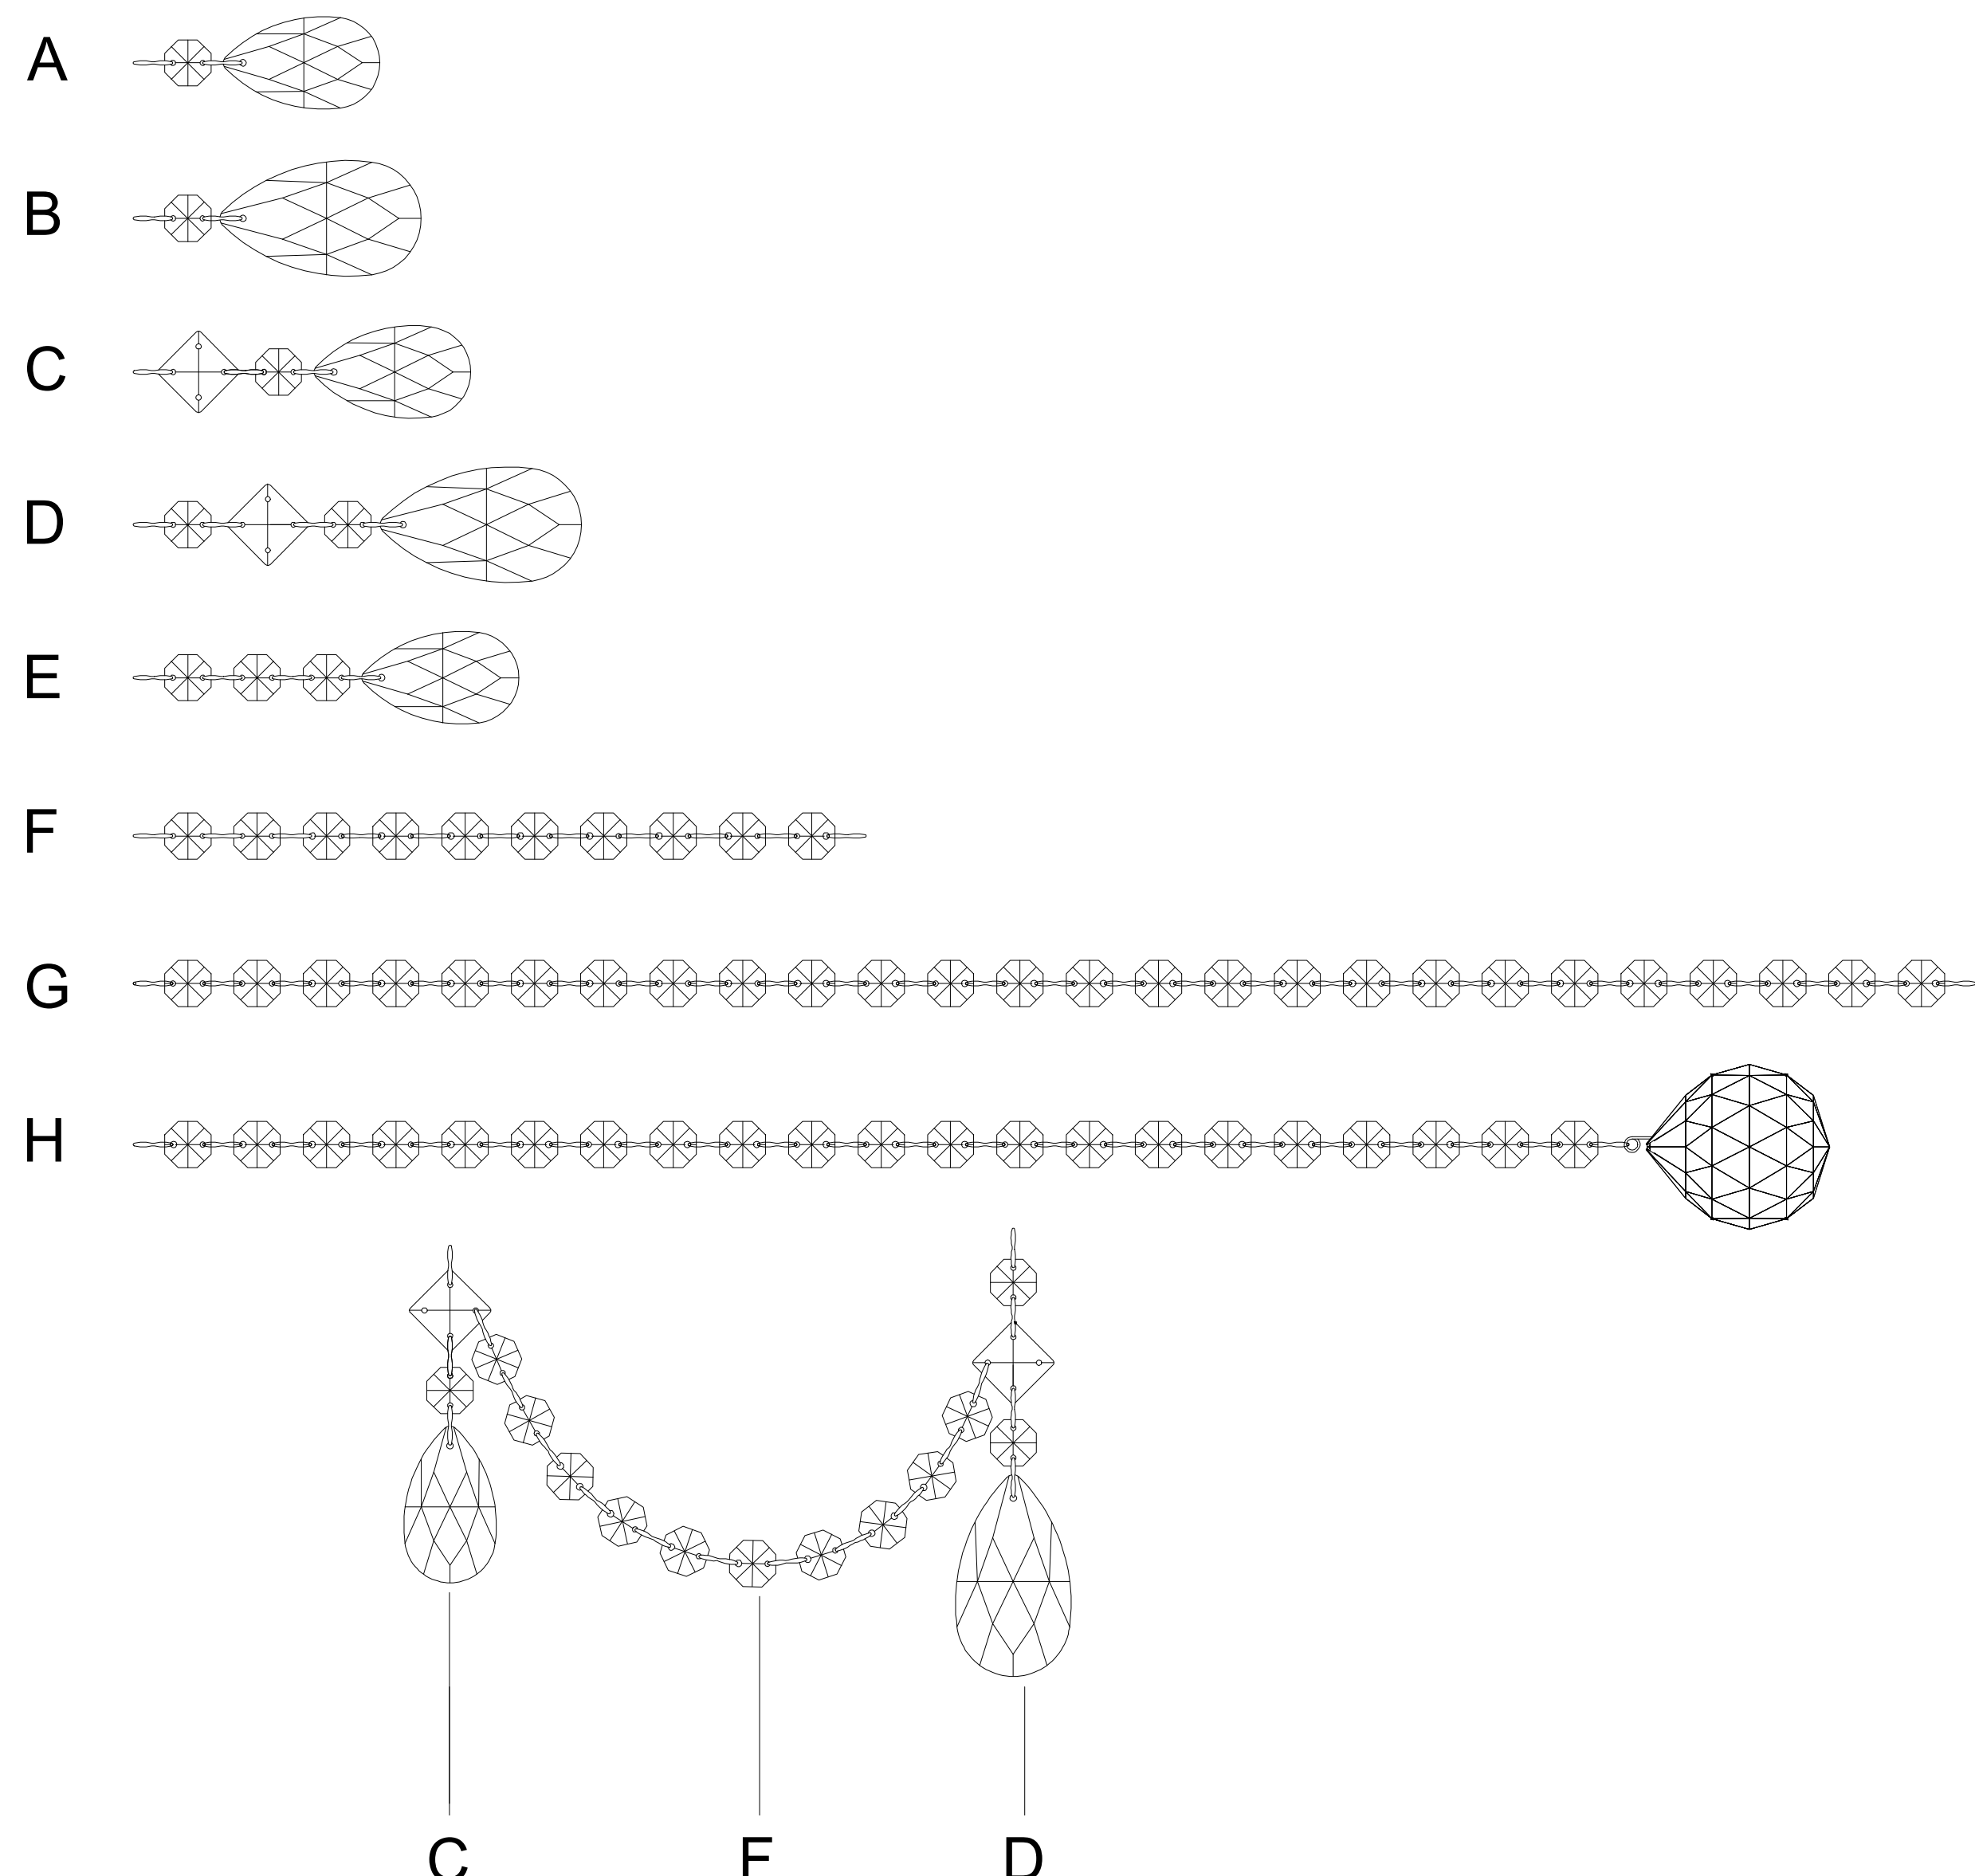

Crystal Sets

- A. (14mm+50mm)x16sets
- B. (14mm+63mm)x8sets
- C. (Square+14mm+50mm)x8sets
- D. (14mm+Square+14mm+63mm)x8sets
- E. (14mmx3pcs+50mm)x8sets
- F. (14mmx10pcs)x16set
- G. (14mmx26pcs)x8set
- H. (14mmx21pcs+50mm Ball)x1set

⚠ WARNING: This product can expose you to lead which is known to the State of California to cause cancer and/or birth defects or reproductive harm For more information go to www.P65Warnings.ca.gov


CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS
ASSEMBLY INSTRUCTION MODEL #6828-CH-CL-MWP

Part Number

Part Numbers

- A. (3)-Wire Connector
- B. (1)-Mounting Plate
- C. (1)-Ground Screw
- D. (1)-Nipple
- E. (2)-Outlet Box Screws
- F. (1)-Canopy (W5.1" xH1") XEH6623CHCAN5IN
- G. (1)-Collar Loop
- H. (1)-Collar Ring
- I. (1)-Chain;72",4mm XEH6623CHCHA4MM
- J. (1)-Loop
- K. (1)-Top Assembly
- L. (1)-Frame
- M. (8)-Bobèche (D3.9"x Hole:1") XEH6623BOB4IN
- N. (8)-Metal Sleeve (H4") XEH6625CHMCDL4IN
- O. (8)-Plastic Sleeve (H4") XEH6625PCDL4IN
- P. (8)-Section of scroll ring
- Q. (1)-Wrench
- R. (8)-metal washer
- S. (8)-hex nut

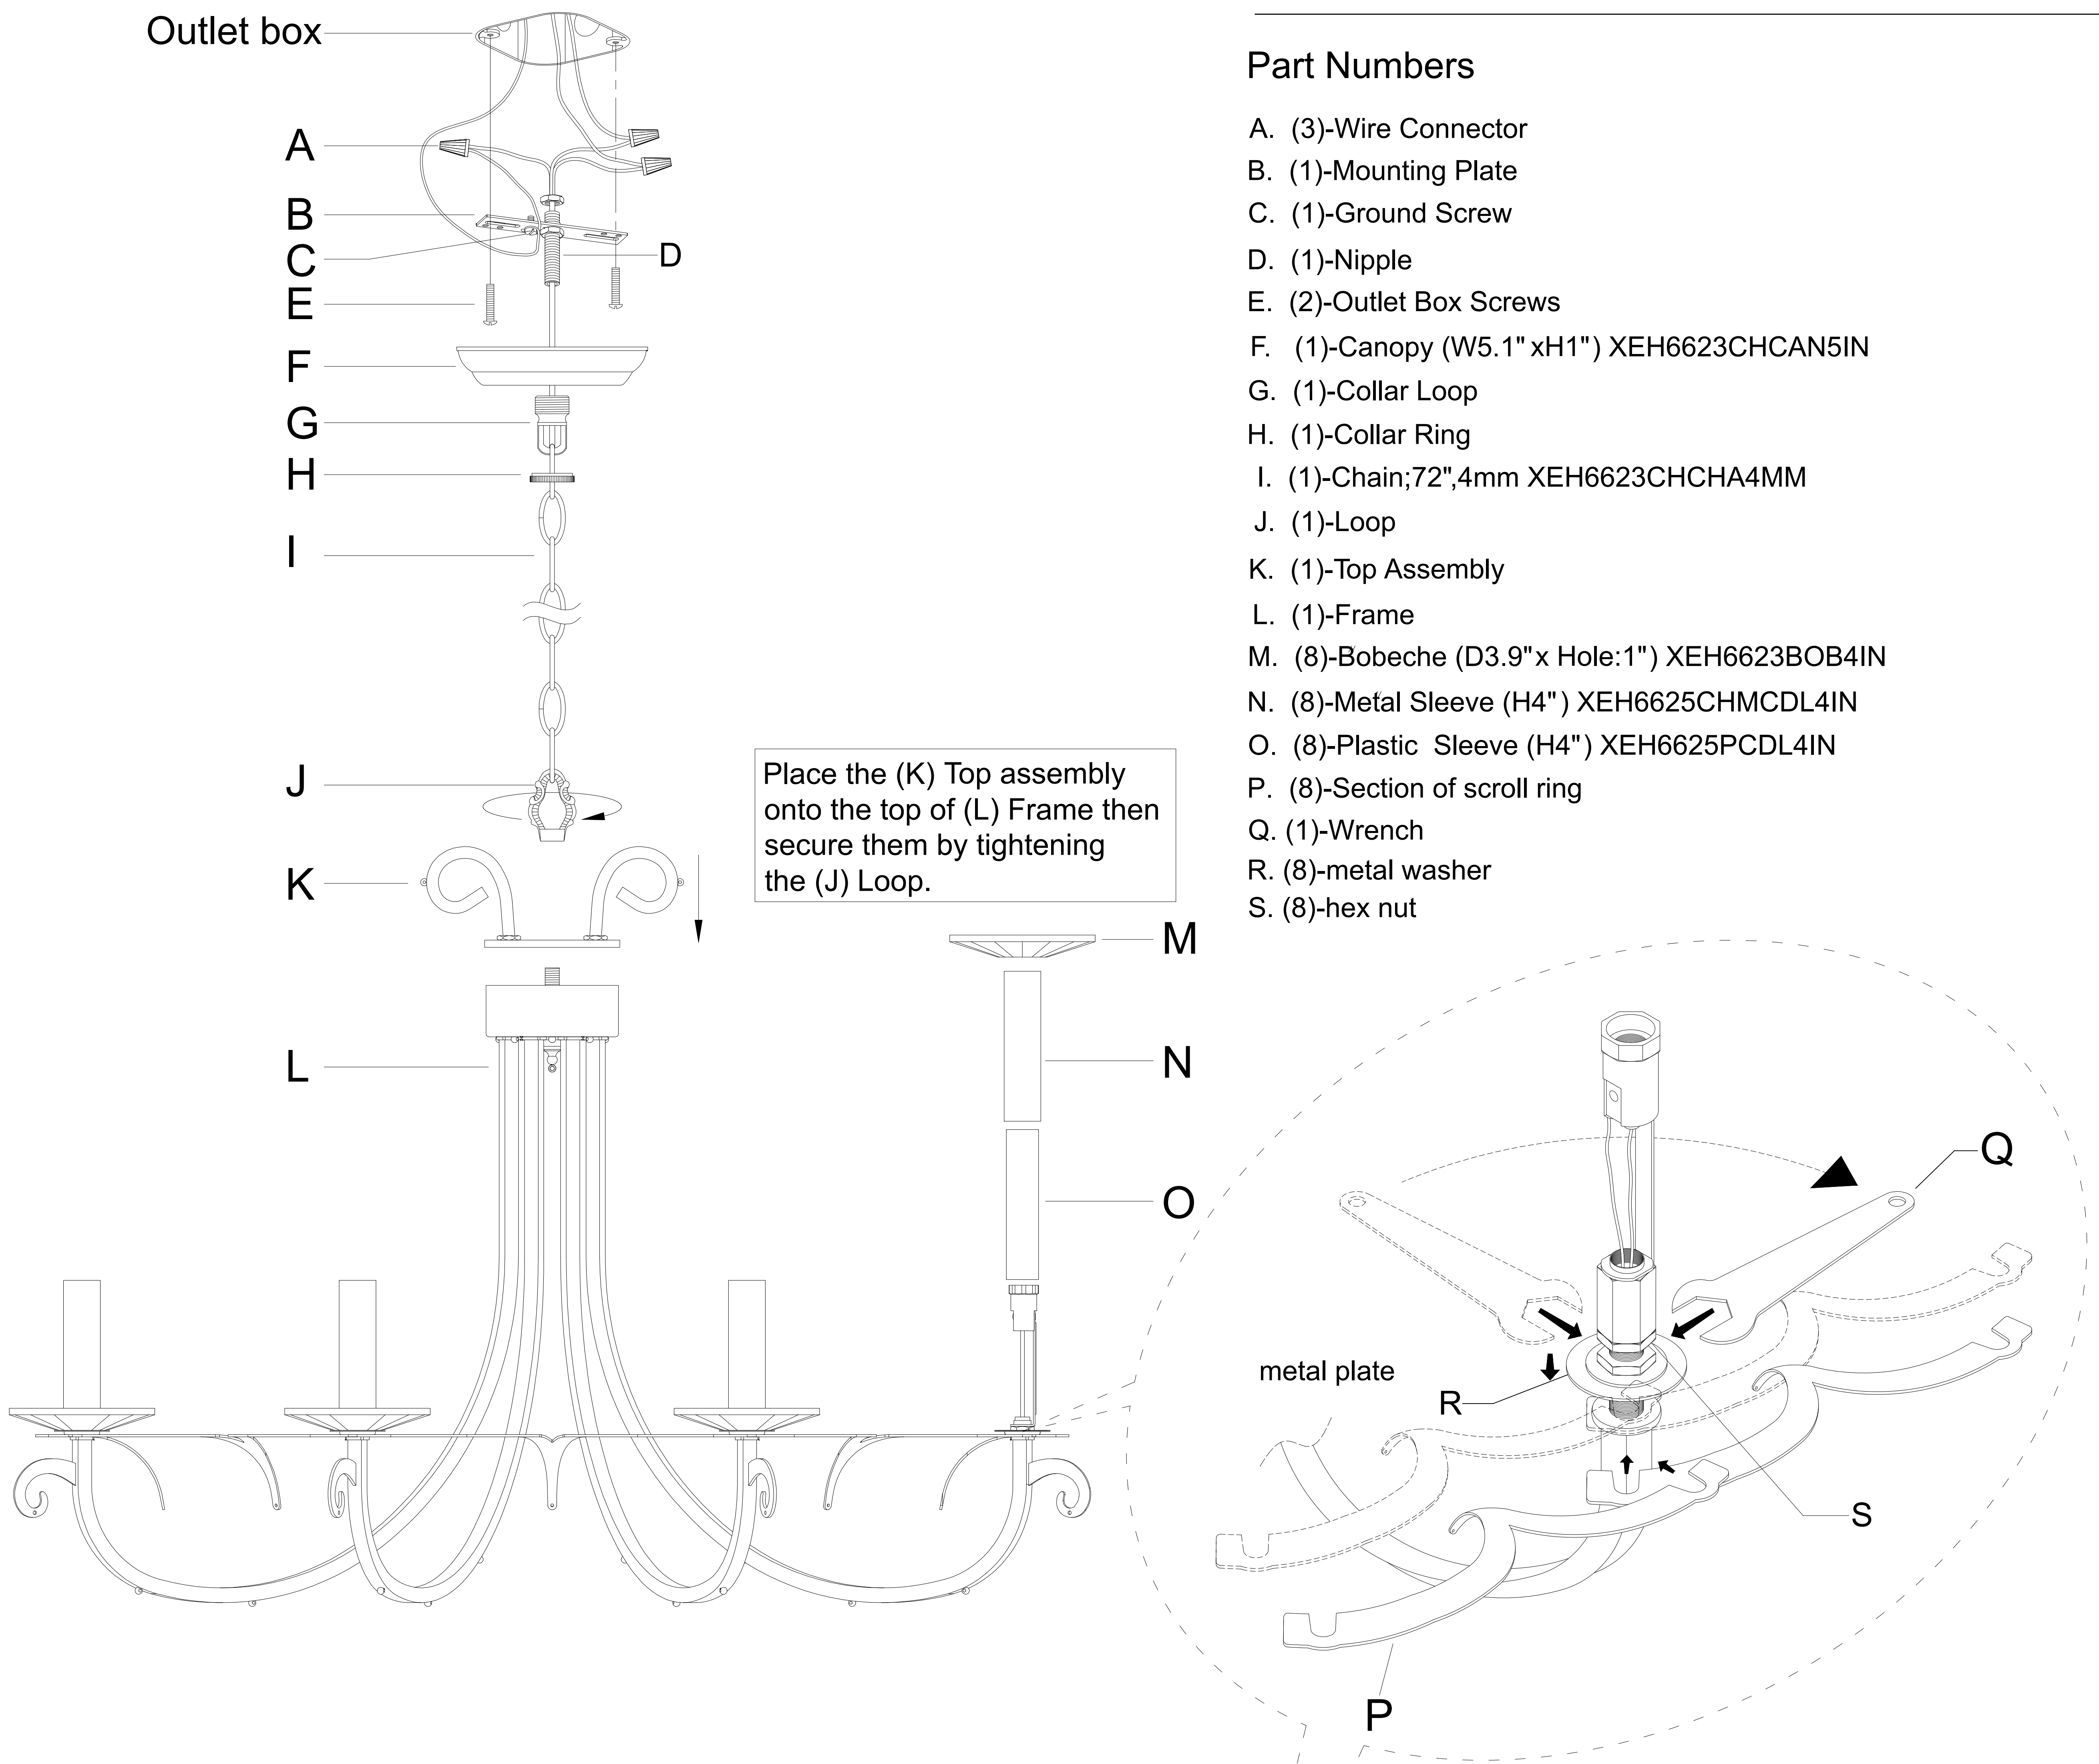


Place the (K) Top assembly onto the top of (L) Frame then secure them by tightening the (J) Loop.



metal plate

1.Space the arms out equally



2.Place the Seagull Metal Parts (P) under the Washers (R) and secure them by tighten the Nut (S) W/ a Hex wrench (Q).

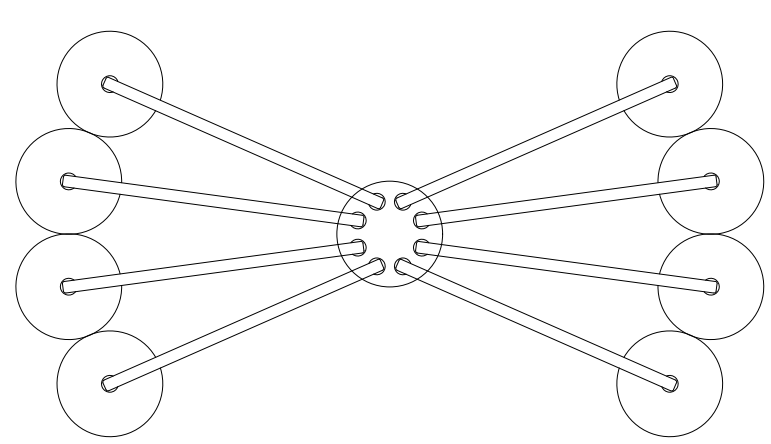

①

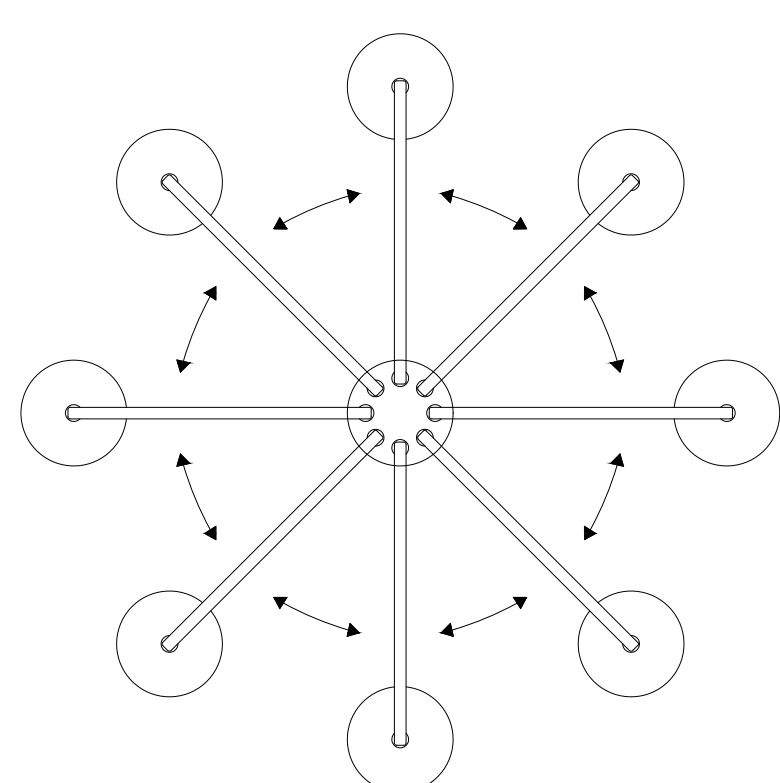

②

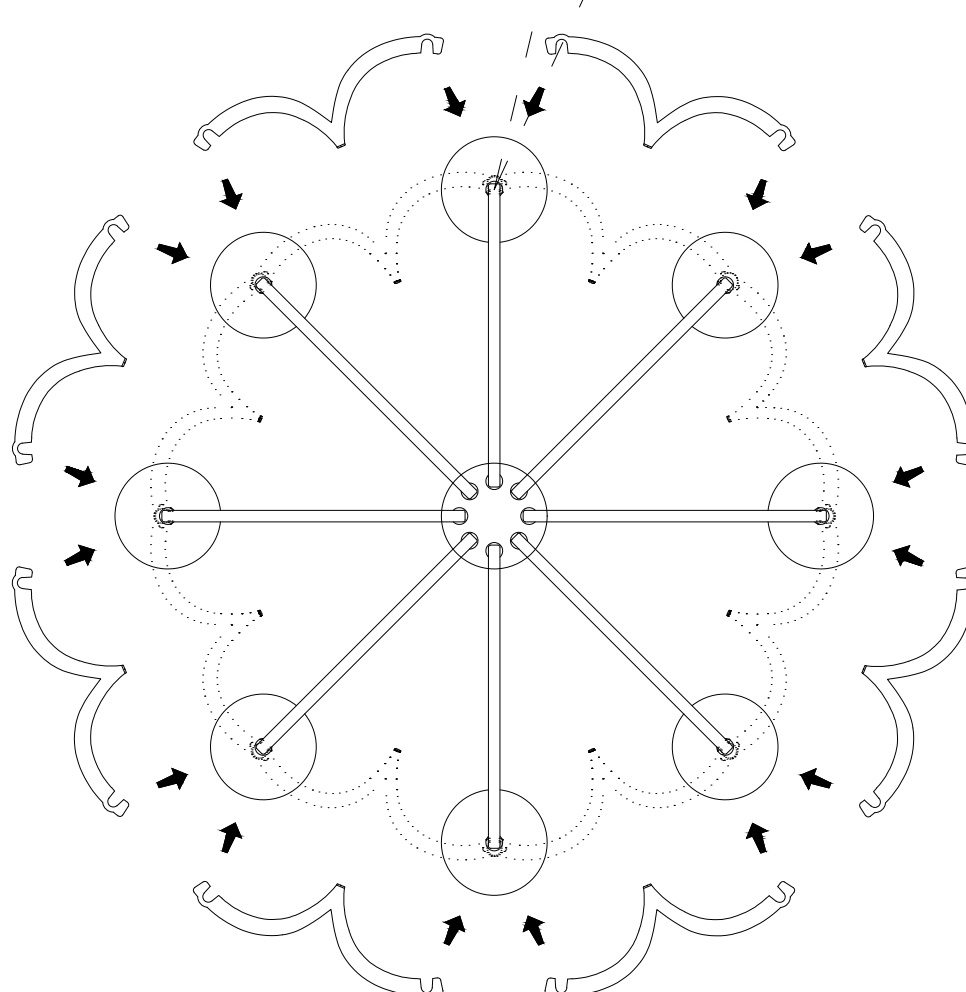

③