




ASSEMBLY INSTRUCTION MODEL # ED0662205VG

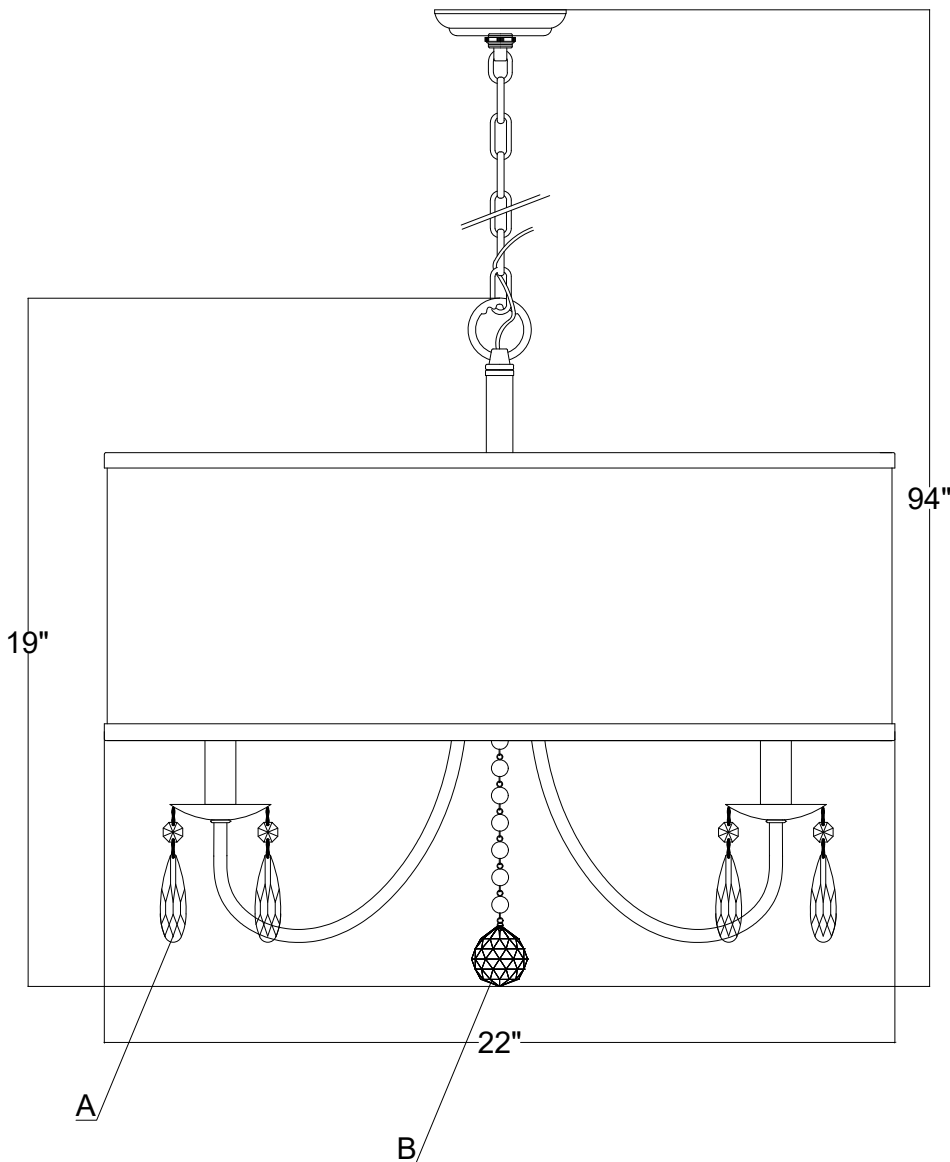

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 5- Candelabra Base Bulb

40 Watts recommended 60 Watts Max.

USE LED BULBS FOR EXTENDED USE

The fixture is Damp rated


HOW TO INSTALL:

1. Insert the Metal Plate (J) onto the threaded nipple on the top of the Lamp Body (L). Insert the Shade (K), another Metal Plate (J) and one of the Check Ring (G), in that order, onto the threaded nipple and secure with the coupling.
2. Screw the Threaded Pipe (I) into the coupling and secure with the hex nut. Slide the Tubing (H) and Check Ring (G) over the Threaded Pipe (I) and secure with the Fixture Loop (F).
3. Decide the preferred hanging height and choose the correct length of chain needed.
4. Install the mounting bar onto the outlet box using two outlet box screws.
5. Raise the fixture up to the ceiling and do the wire connection. Secure the canopy with the collar ring.
6. Dress the crystals as illustrated.

Crystal Sets

- A. 10 Sets (10)14mm+63mm.
B. 1 Sets (13)10mm+(1)40mm Ball.

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.p65warnings.ca.gov



ASSEMBLY INSTRUCTION MODEL # ED0662205VG

Part Number

Part Numbers

- A. Mounting hardware
 - Wire Connector × 2.
 - Mounting Bar × 1.
 - Mounting Screw × 2.
 - Washer × 1.
 - Nut × 1.
 - Threaded × 1.

- B.(1)-Canopy;W5"H1.25" -XEH0662205VGCAN5IN
- C.(1)-Collar Ring
- D.(1)-Collar Loop- XEH0662205VGSCL
- E.(1)-Chain T:4MM× L:72" -XEH0662205VGCHA4MM
- F.(1)-Fixture Loop -XEH0662205VGLLOOP
- G.(2)-Check Ring
- H.(1)-Tubing L:3.1"
- I.(1)-Threaded Pipe
- J.(2)-Metal Plate Ø1.78"
- K.(1)-Shade ;Ø22"H8.3"-XEH0662205VGSCHA22IN
- L.(1)-Lamp Body
- M.(5)-Candle Sleeve L:4.2"

