


150.7100 | Two Output Shower W/ Rain Head, Hand Held & Slidebar

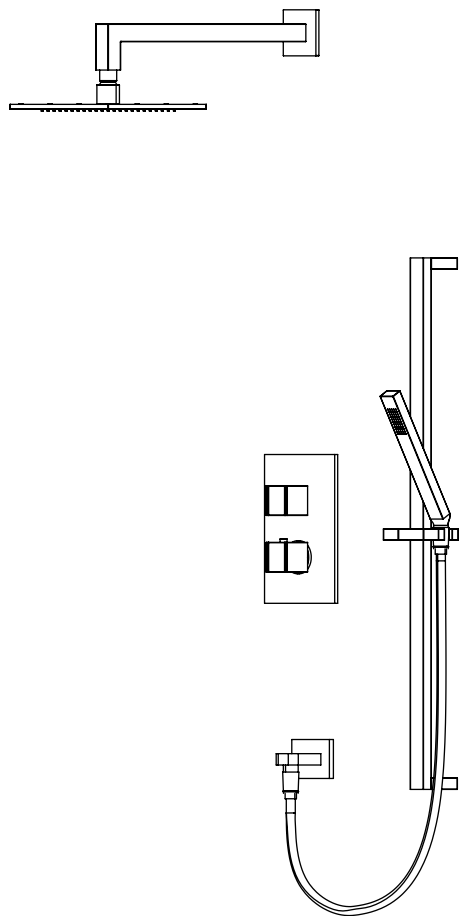

COMPONENTS

- HS1011SA - 16" Shower Arm
- HS1001A - 8" Shower Head
- 150.4000T - Shower Trim
- TVH.4420F - Shower Valve
- HS1006H - Hand Held
- 160.5505 - Wall Elbow
- SP.150EM - 1.5m Hose
- 160.601003A - Slide Bar

SHOWER VALVE:

- Thermostatic shower valve
- Valve includes service stops
- Turn Bottom handle to set temp.
- Top handle controls water diversion
- Includes 15109 non-shared cartridge

SHOWER HEAD:

- Solid brass construction
- 1.8 GPM flow rate

HAND HELD W SLIDE BAR & ELBOW:

- Solid brass construction
- Hand held flow rate 1.8 GPM
- 1/2" female NPT elbow connection
- With back flow prevention check valve

STANDARDS:

- ASME A112.18.1 / CSA B125.1

See individual component specification sheets on following pages for further details.