

FEATURES

- Brass construction for durability and reliability
- Pressure-balancing technology maintains water temperature within +/- 3 degrees Fahrenheit
- High-temperature limit stop allows you to preset a comfortable maximum temperature to eliminate scalding
- Unlacquered Brass (ULB): available only in North America and United Kingdom
- Complements the Central Park West collection

CODES/STANDARDS APPLICABLE


Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- ICC/ANSI A117.1
- ADA*
- OBC*
- CSA B651*

* Compliant when installed to the specific requirement of this regulation

P21375

ADA **CSA B651** **OBC**

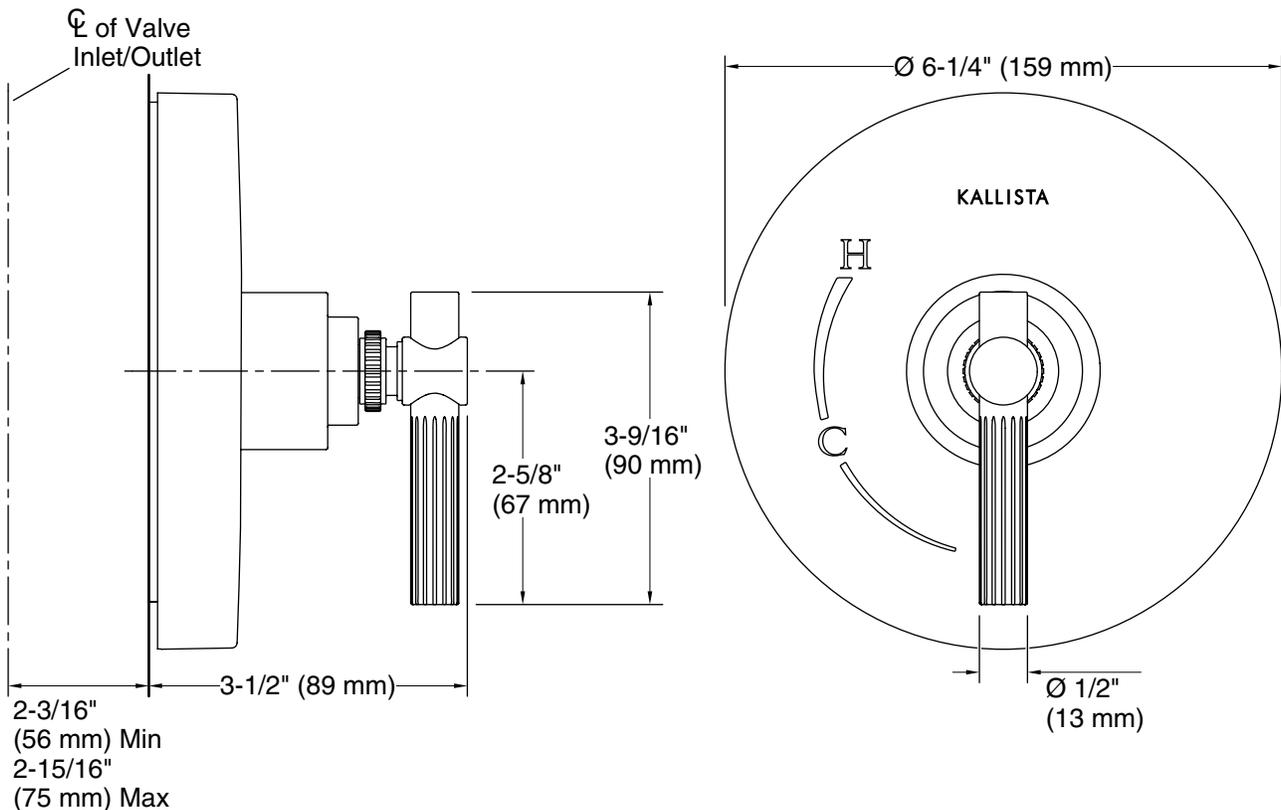

SPECIFIED MODEL				
Model	Description	Finishes		
P21375-LV	Central Park West Pressure Balance Trim	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> SN Polished Nickel	<input type="checkbox"/> ULB Unlacquered Brass
				<input type="checkbox"/> BV Brushed Bronze
Required Rough-In				
P19310-00	Pressure Balance Rough-In	<input type="checkbox"/> NA		
P19310-US	Pressure Balance Valve, with Stops - PEX inlet	<input type="checkbox"/> NA		
P19310-WS	Pressure Balance Rough-In with Stops	<input type="checkbox"/> NA		
P29500-00	Pressure Balance Rough-In & Thermostatic Cartridge	<input type="checkbox"/> NA		
P29500-WS	Pressure Balance Rough-In & Thermostatic Cartridge with Stops	<input type="checkbox"/> NA		

We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.