# KALLISTA.

### One<sup>™</sup> by KALLISTA Sink Faucet, Low Spout, Lever Handles P24491-LV

#### Features

- A selection of products within this collection is in stock and ready to ship. Please visit kallista.com/readytoship for the complete list of Ready-to-Ship products and finishes
- High-quality solid-brass construction for durability and reliability
- Widespread sink faucet for 8" 16" (203 406 mm) centers
- 1.2 gpm (4.5 lpm) maximum flow rate
- Spout reach is 5-5/16" (135 mm)
- Includes soft-touch drain
- Laminar flow
- Lift rod option available for projects

Recommended Products/Accessories P74234-WO Under-mount Sink, Soft Rectangle with Overflow, Glazed P24490-CR Sink Faucet, Gooseneck Spout, Cross Handles P34410-00 Towel Ring P34407-00 Disc Hook





Codes/Standards ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61 NSF/ANSI/CAN 372 DOE - Energy Policy Act 1992 EPA WaterSense= California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC

KALLISTA. Five-Year Limited Warranty See website for detailed warranty information.


Available Colors/Finishes Color tiles intended for reference only.

Color Code Description

	СР	Polished Chrome
	GN	Gunmetal
	BL	Matte Black
	ULB	Unlacquered Brass
	BAF	Brushed French Gold
S.	BGP	Brushed Graphite
	BN	Brushed Nickel

# KALLISTA.

### One<sup>™</sup> by KALLISTA Sink Faucet, Low Spout, Lever Handles P24491-LV

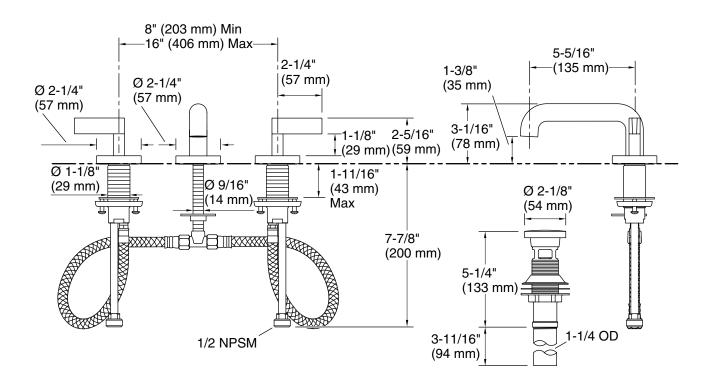

Technical InformationAll product dimensions are nominal.Faucet flow rate:1.2 gal/min (4.5 l/min)

Drain included: Yes Drain with Yes

overflow:

Spout:

Spout reach: 5-5/16" (135 mm)

Pressure/fixture Supply Requirements Min flow rate: 1.8 gpm (6.8 lpm)

#### Notes

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.