
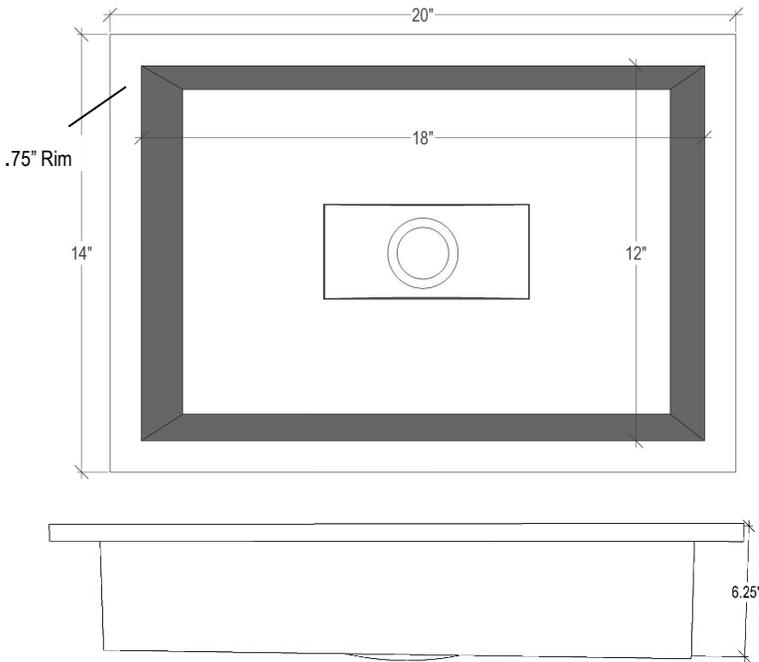


Shown in Gray

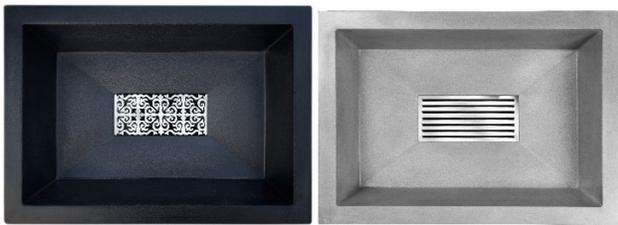

AC05

Oliver Concrete Rectangle Sink with Grate Recess

DETAILS

Installation Type: AC05DI (Drop-In) or AC05UM (Undermount)

No Overflow

Uses standard 1.5" drain

Glass Fiber Reinforced Concrete

Each sink is hand-crafted; no two sinks will be the same.

AVAILABLE FINISHES

G	Gray
BLK	Black

AVAILABLE DRAINS

D004	Grid Strainer
-------------	---------------

AVAILABLE GRATES (Not sold as a stand-alone item)

	GM001	Filigree Grate	PS, SS, PB, UB, BCS <i>satın black</i>
	GM003	Spoke Grate	PS, SS, PB, UB, BCS <i>satın black</i>
	GM004	Hawaiian Quilt Grate	PS, SS, PB, UB, BCS <i>satın black</i>
	GM007	Square Bars Grate	PS, SS, PB, UB, BCS <i>satın black</i>
	GM008	Deco Grate	PS, SS, PB, UB, BCS <i>satın black</i>

NOTE: Order grate as a separate line item. Grate should be ordered at the same time as sink – grates not sold as stand-alone items.

INSTALLATION

DROP-IN: Cut opening large enough for the sink to be "dropped in" to countertop.
UNDERMOUNT: Cuts in countertop are up to the discretion of the installer. Clips or other installation method must be provided by the fabricator/installer.
 Use 100% silicone to adhere sink to countertop. Clean any excess silicone from sink surface. A conversion kit for drain installation is provided with each sink with 1.5" drain opening.

CARE

Concrete sinks are crafted from glass fiber reinforced concrete (GFRC). Linkasink hand-etches then seals each sink with a 7 Step impregnating sealer. Use Windex® with Vinegar for cleaning as needed. The sink should not be exposed to harsh or acidic chemicals, cleaners or scrubbers.

WARRANTY

Linkasink warranties our product to be free from manufacturing defect for the life of the product. Warranty does not cover improper care, neglect or abuse.

DIMENSIONS WILL VARY

DO NOT use this sheet as a guide for countertop cuts. Due to the handmade nature of each product, templates are not provided.