



# ENGINEERING EXCELLENCE

#4011B


SPECIFICATION SHEET

### DESCRIPTION

- Single Handle Tub and Shower Valve Set
- Combo CXC and IPS Inlet and Outlet Connections
- Washerless Cartridge with Adjustable Temperature Limit Stop
- Back to Back Installation
- Wide Internal Waterways

### Caution:-

- Stainless Steel Pressure Balancing Spool is Included in Trim Pack Only.

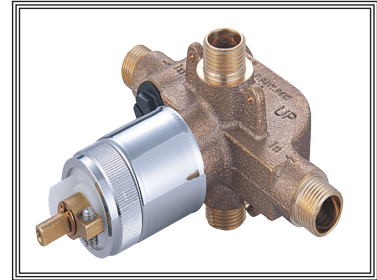

#4011B SHOWN

### STANDARDS APPLICABLE

- ASME A112.18.1
- ASSE 1016
- CUPC / IAPMO LISTED

Model #: \_\_\_\_\_

Specific Features: \_\_\_\_\_

Project Name: \_\_\_\_\_

Submitted For: \_\_\_\_\_

Model	Description	Finishes
#4011B	Single Handle Tub and Shower Valve Set	NA




ENGINEERING EXCELLENCE

Pioneer: 1-800-338-9468  
 Commerce, CA 90040  
 www.pioneerind.com  
 Pioneer Industries, Inc. © 2009

DMSP4011B/REV. 12 2009  
 Page 1 of 2

**Installation Note:**

Please refer to Installation Guide For this Product. Also Please refer to Installation Guide For the Rough-in Valve. Avoid Cross Flow Connections. Do not install a Shut off valve to any of the outlets. Install a 305 MM [12"] Straight Pipe with single elbow for bath between the rough-in valve and the tub spout. Cap the Tub port or Shower Port For Shower Only or Tub Only Installation.

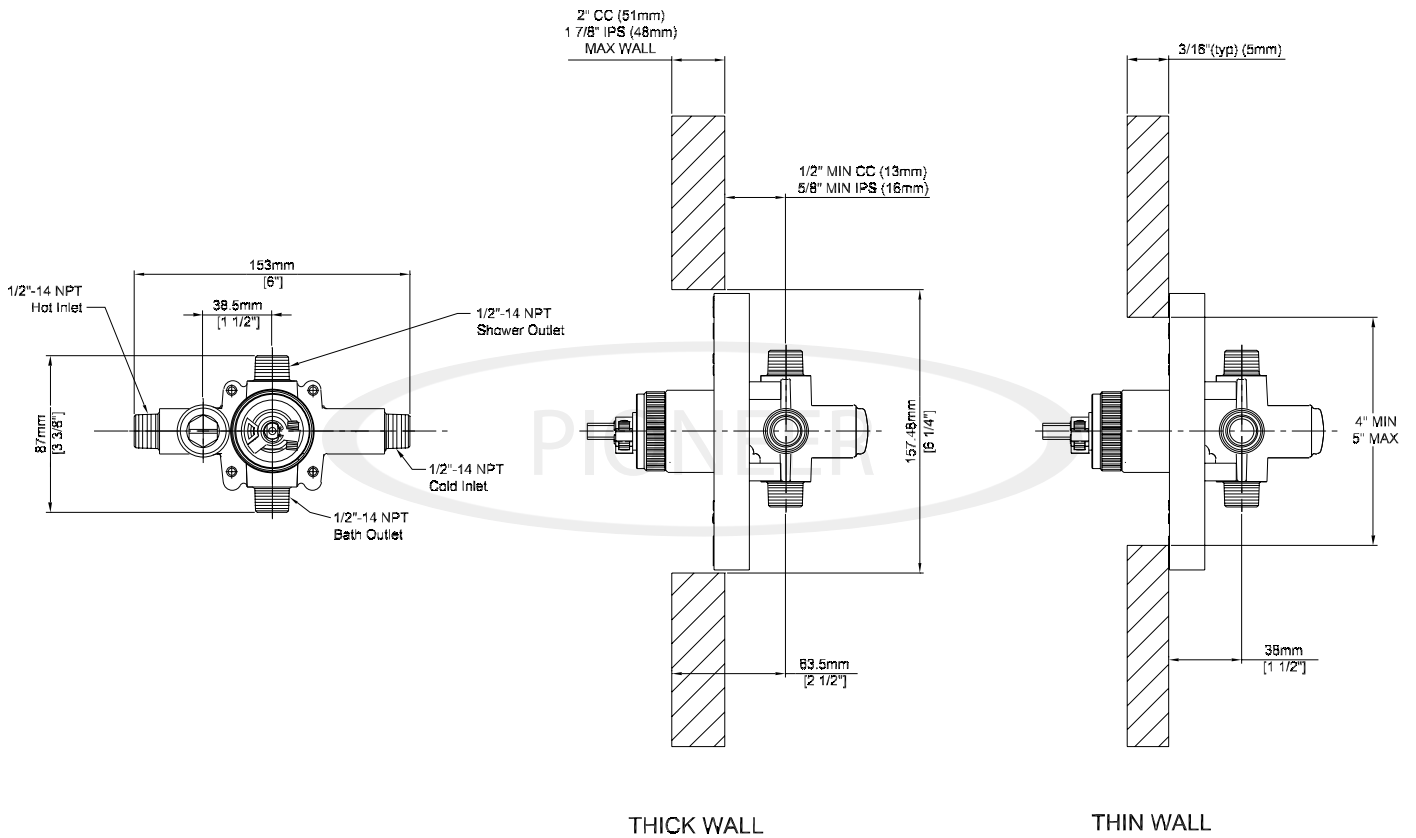

**Product Diagram**



ENGINEERING EXCELLENCE

Pioneer: 1-800-338-9468  
 Commerce, CA 90040  
 www.pioneerind.com  
 Pioneer Industries, Inc. © 2009