# ENGINEERING EXCELLENCE

PIONEER

# Americana Series #4AM100TX

#### DESCRIPTION

- Single Handle Tub and Shower
  Trim Set
- Metal Lever Handle
- Stainless Steel Pressure Balancing Spool
- Single Function 3-1/2" Diameter Showerhead
- 13" Long Shower Arm and Flange
- 1/2" IPS Diverter Tub Spout
- Tub Spout Escutcheon

#### STANDARDS APPLICABLE

- ASME A112.18.1
- ANSI A117.1
- CUPC / IAPMO LISTED /ADA COMPLIANT

#### **FINISHES**

- PC PVD Polished Chrome
   BN PVD Brushed Nickel
- BN PVD Brushed Nickel
- SS PVD Stainless Steel
- PN PVD Polished Nickel
- PB PVD Polished Brass
- GR PVD Golden Rose
- ORB Oil Rubbed Bronze
- TB PVD Tuscany Bronze



| <u>Flow</u> |
|-------------|
|-------------|

Single Handle Tub And Shower Valve Set

• Showerhead Limited to 2.5 GPM Flow Rate

| Specific | Features: |
|----------|-----------|

Project Name:

Model #:

Submitted For:

#1910B



ENGINEERING EXCELLENCE

Pioneer:1-800-338-9468 Commerce, CA 90040 www.pioneerind.com Pioneer Industries, Inc. © 2013 DMSP4AM100TX/REV. 12 2012 Page 1 of 2

□ N/A


### SPECIFICATION SHEET

# Americana Series #4AM100TX

### SPECIFICATION SHEET

#### Installation Note:

Please refer to Installation Guide For this Product. Also Please refer to Installation Guide For the Rough-in Valve. Avoid Cross Flow Connections. Do not install a Shut off valve to any of the outlets. Install a 305 MM [12"] Straight Pipe with single elbow for bath between the rough-in valve and the tub spout.

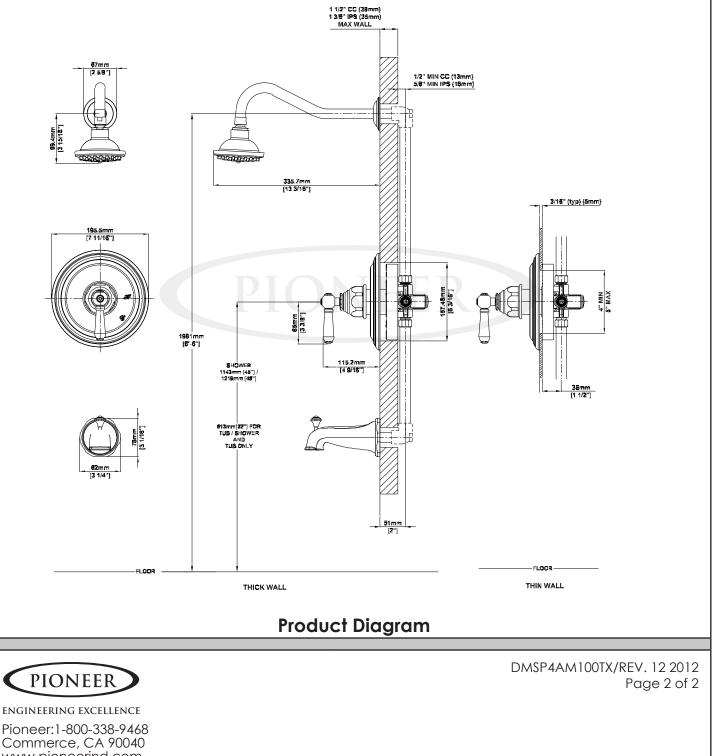

www.pioneerind.com Pioneer Industries, Inc. © 2013