



# ENGINEERING EXCELLENCE

Americana Series #4AM300TX

SPECIFICATION SHEET

### DESCRIPTION

- Single Handle Shower Trim Set
- Metal Lever Handle
- Stainless Steel Pressure Balancing Spool
- Single Function 3-1/2" Diameter Showerhead
- 13" Long Shower Arm and Flange

### FINISHES

- PC PVD Polished Chrome
- BN PVD Brushed Nickel
- SS PVD Stainless Steel
- PN PVD Polished Nickel
- PB PVD Polished Brass
- GR PVD Golden Rose
- ORB Oil Rubbed Bronze



#4AM300TX SHOWN \* ADA 

### STANDARDS APPLICABLE

- ASME A112.18.1
- ANSI A117.1
- CUPC / IAPMO LISTED /ADA COMPLIANT

### FLOW

- Showerhead Limited to 2.5 GPM Flow Rate

Model #: \_\_\_\_\_

Specific Features: \_\_\_\_\_

Project Name: \_\_\_\_\_

Submitted For: \_\_\_\_\_

Model	Description	Finishes
#4AM300TX	Single Handle Shower Trim Set	<input type="checkbox"/> PC <input type="checkbox"/> Other ____

Required Valve		
#1910B	Single Handle Tub And Shower Valve Set	<input type="checkbox"/> N/A



ENGINEERING EXCELLENCE


Pioneer:1-800-338-9468  
 Commerce, CA 90040  
 www.pioneerind.com  
 Pioneer Industries, Inc. © 2013

DMSP4AM300TX/REV. 12 2012

Page 1 of 2

**Installation Note:**

Please refer to Installation Guide For this Product. Also Please refer to Installation Guide For the Rough-in Valve. Avoid Cross Flow Connections. Do not install a Shut off valve to any of the outlets. Cap the tub Port for shower only Installation.

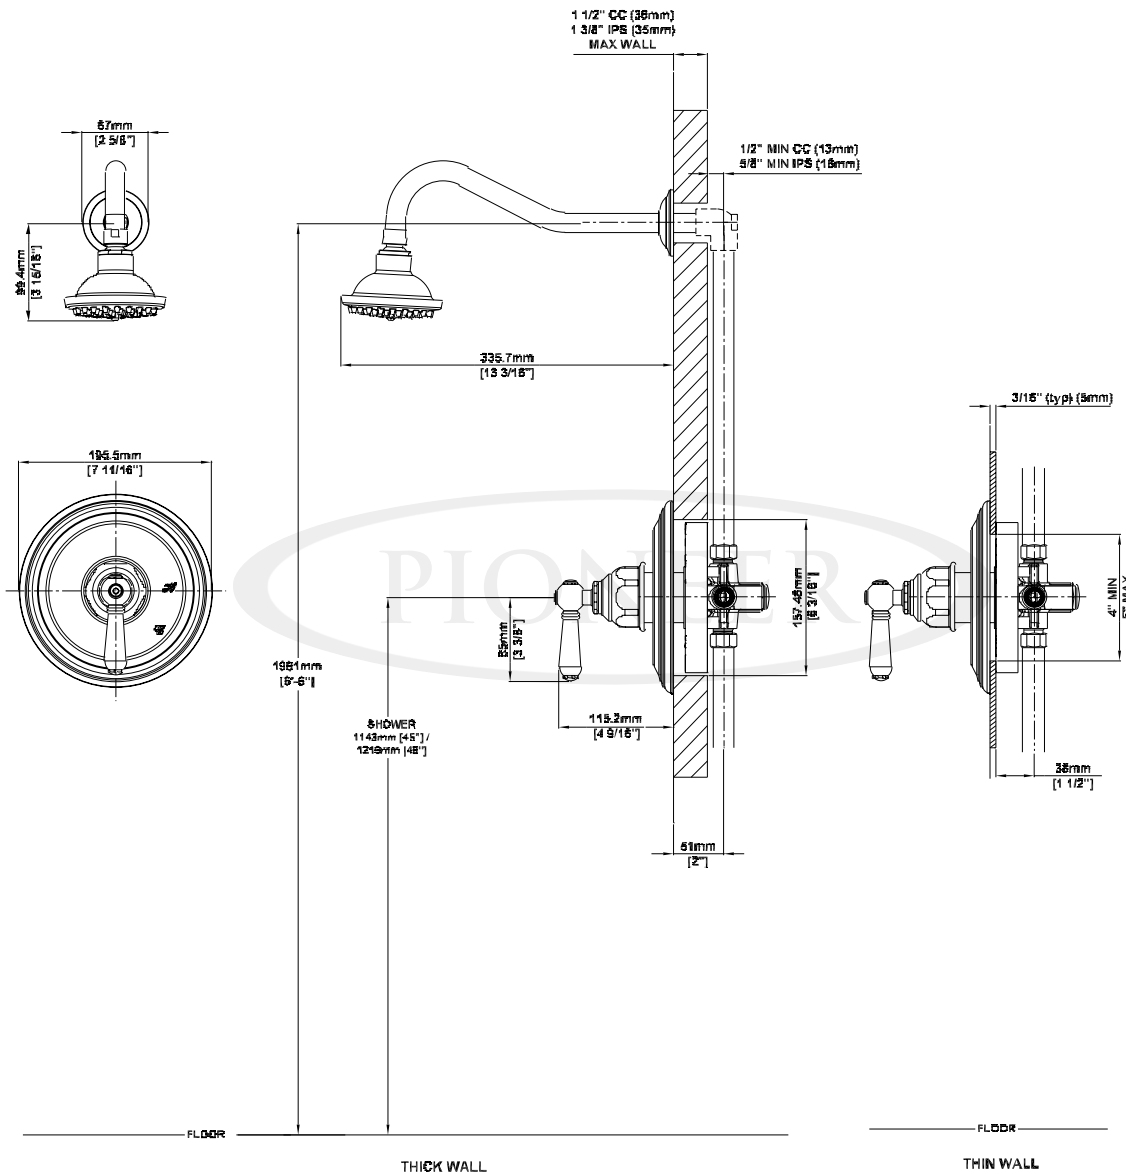

**Product Diagram**



ENGINEERING EXCELLENCE

Pioneer: 1-800-338-9468

Commerce, CA 90040

www.pioneerind.com

Pioneer Industries, Inc. © 2013