



# ENGINEERING EXCELLENCE

## Brentwood Series #4BR302T

## SPECIFICATION SHEET

### DESCRIPTION


- Single Handle Shower Trim Set
- Brentwood Lever Handle
- Brentwood Face Plate
- Ceramic Disc Cartridge with Temperature Limit Stop
- 4 Spray Pattern Showerhead
- Shower Arm and Flange

### FINISHES

- PC PVD Polished Chrome
- BN PVD Brushed Nickel

### FLOW

- Showerhead Limited to 2.5 gpm

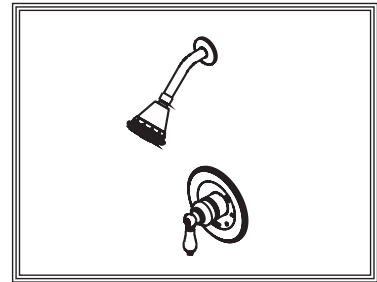

#4BR302T SHOWN \* ADA

### STANDARDS APPLICABLE

- ASME A112.18.1
- CUPC / IAPMO LISTED

Model #: \_\_\_\_\_

Specific Features: \_\_\_\_\_

Project Name: \_\_\_\_\_

Submitted For: \_\_\_\_\_

Model	Description	Finishes	
#4BR302T	Single Handle Shower Trim Set	<input type="checkbox"/> PC	<input type="checkbox"/> Other___
Required Valve			
#4020B	Single Handle Tub and Shower-Valve Set Only	<input type="checkbox"/> N/A	




ENGINEERING EXCELLENCE

Pioneer: 1-800-338-9468  
 Commerce, CA 90040  
 www.pioneerind.com  
 Pioneer Industries, Inc. © 2009

DMSP4BR302T/REV. 08 2012  
 Page 1 of 2

**Installation Note:**

Please refer to Installation Guide For this Product. Also Please refer to Installation Guide For the Rough-in Valve. Avoid Cross Flow Connections. Do not install a Shut off valve to any of the outlets. Install a minimum 305 MM [12"] Straight Pipe with single elbow for bath between the rough-in valve and the tub spout.

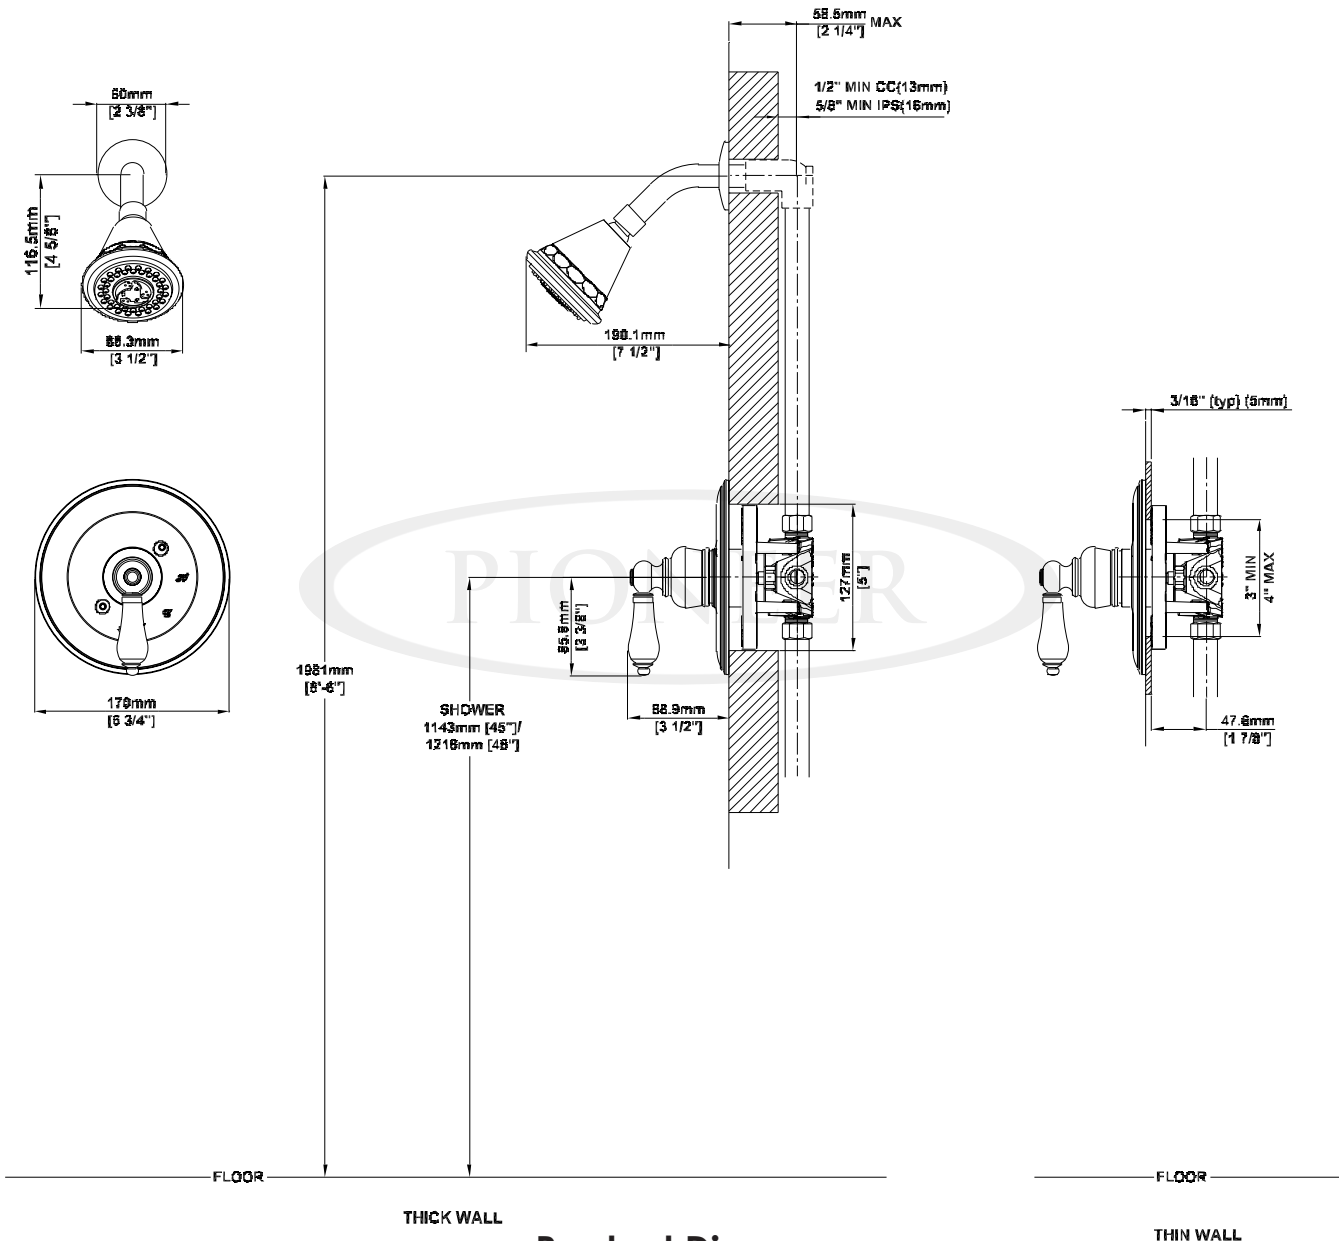

**Product Diagram**



ENGINEERING EXCELLENCE

Pioneer: 1-800-338-9468  
 Commerce, CA 90040  
 www.pioneerind.com  
 Pioneer Industries, Inc. © 2009