



# ENGINEERING EXCELLENCE

**Brentwood Series #4BR320T**

**SPECIFICATION SHEET**

DESCRIPTION

- Single Handle Shower Trim Set
- Porcelain Cross Handle
- Ceramic Disc Cartridge with Temperature Limit Stop
- Dual Function 2-1/2" Diameter Showerhead
- Shower Arm and Flange
- Color Match Sleeve and Retaining Ring

FINISHES

- PC PVD Polished Chrome
- BN PVD Brushed Nickel
- PN PVD Polished Nickel
- PB PVD Polished Brass
- ORB Oil Rubbed Bronze



#4BR320T SHOWN

STANDARDS APPLICABLE

- ASME A112.18.1
- CUPC / IAPMO LISTED / ADA COMPLIANT

FLOW

- Showerhead Limited to 2.5 GPM

Model #: \_\_\_\_\_

Specific Features: \_\_\_\_\_

Project Name: \_\_\_\_\_

Submitted For: \_\_\_\_\_

Model	Description	Finishes
#4BR320T	Single Handle Shower Trim Set	<input type="checkbox"/> PC <input type="checkbox"/> Other__

Required Valve		
----------------	--	--

#4020B	Single Handle Tub and Shower-Valve Set	<input type="checkbox"/> N/A
--------	--	------------------------------




DMSP4BR320T/REV. 12 2012  
Page 1 of 2

ENGINEERING EXCELLENCE  
 Pioneer: 1-800-338-9468  
 Commerce, CA 90040  
 www.pioneerind.com  
 Pioneer Industries, Inc. © 2013

**Installation Note:**

Please refer to Installation Guide For this Product. Also Please refer to Installation Guide For the Rough-in Valve. Avoid Cross Flow Connections. Do not install a Shut off valve to any of the outlets. Install a 305 MM [12"] Straight Pipe with single elbow for bath between the rough-in valve and the tub spout.

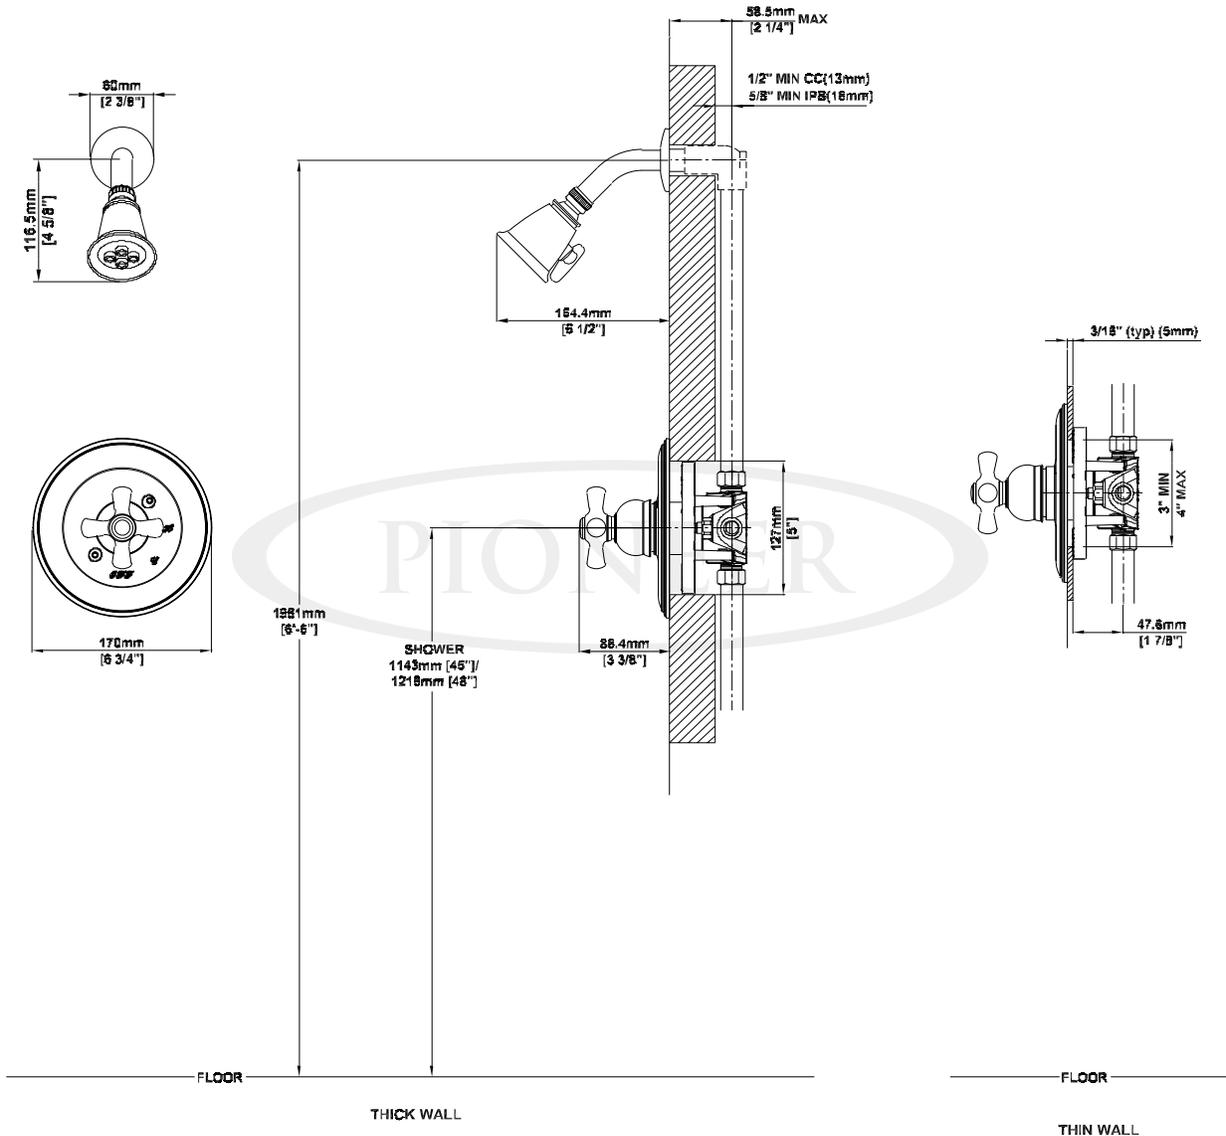

**Product Diagram**



ENGINEERING EXCELLENCE

Pioneer: 1-800-338-9468  
 Commerce, CA 90040  
 www.pioneerind.com  
 Pioneer Industries, Inc. © 2013