


## HUNLEY KITCHEN FAUCET / 12" ARTICULATED SPOUT / 4PC. SUITE

# 3600-12-4

- Max Counter Thickness 2-3/8"
- Minimum Install Hole Size 1-3/8"

- A. Side Spray Connection with 1/4" NPT Pipe Fitting
- B. Supply Hoses - 20" Long with 3/8" Compression Fittings

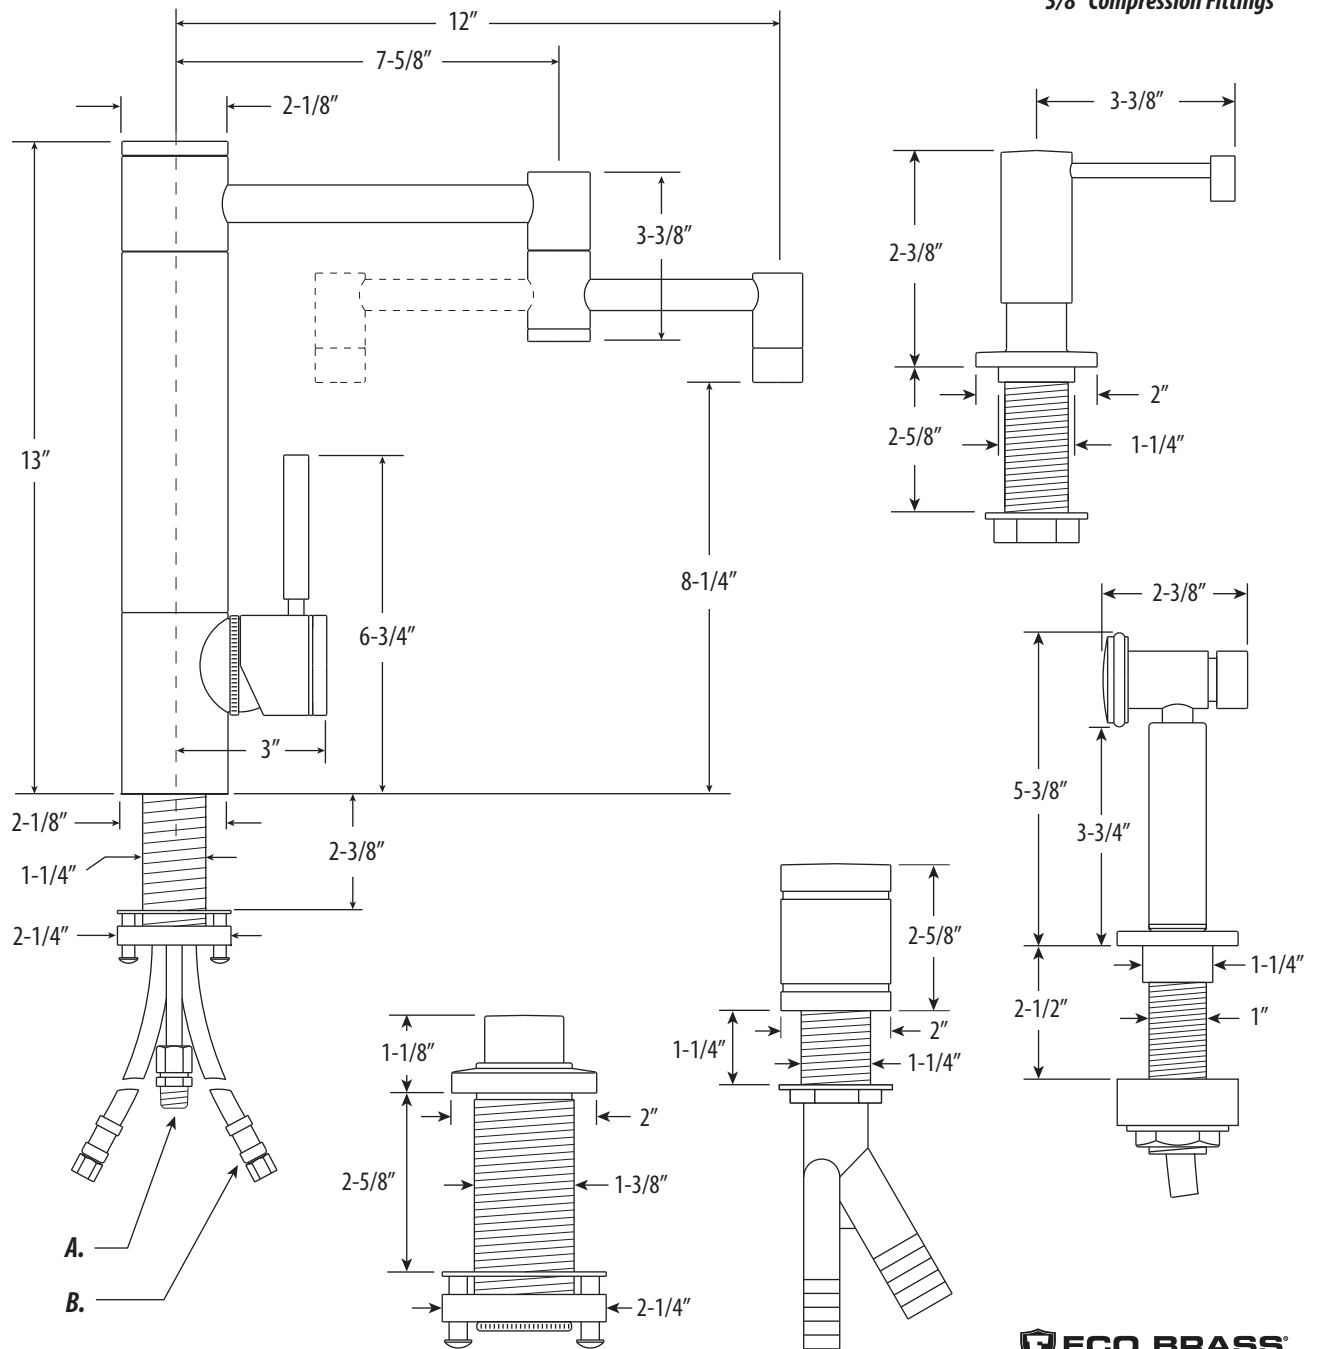

***DIMENSIONS MAY VARY AND ARE SUBJECT TO CHANGE. NO RESPONSIBILITY IS ASSUMED FOR USE OF SUPERCEDED OR VOIDED DATA***

## HUNLEY KITCHEN FAUCET / 12" ARTICULATED SPOUT / 4PC. SUITE

# 3600-12-4



Finish Shown - Chrome

### FEATURES

- Suite includes faucet, side spray, soap/lotion dispenser, air switch single port air gap.
- Part of the contemporary Hunley Suite.
- Articulated spout has 12" reach and can swivel 360 degrees.
- Equipped with spray diverter and 1/4" NPT pipe fitting connection for optional side spray.
- 1.75 gpm maximum flow rate with aerated tip.
- Ergonomic single lever handle.
- Adjustable tension ring helps handle feel and prevents sag.
- Single handle can mount in front, right or left hand positions.
- When mounted on side, handle can adjust 22.5 degrees for backsplash clearance.
- Hot/cold ceramic disk valve cartridge.
- Made from solid brass or 316 stainless steel.
- Resistant to reverse osmosis water.
- Reinforced braided connection hoses.
- Reversible or removable hot/cold indicator rings.
- Lifetime functional warranty.
- Made in the USA.

### CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- ASME A112.18.1
- CSA B125.1
- NSF 61, 372
- CALGreen



AVAILABLE IN 30 FINISHES + 316 MARINE GRADE STAINLESS STEEL