Eco Guinevere® One-Piece Toilet, 1.28GPF

FEATURES

- Double Cyclone® flushing system, low consumption (1.28GPF/4.8LPF)
- Optional SanaGloss® ceramic glaze SanaGloss glaze prevents debris, mold and bacteria from sticking to ceramic surfaces, leading to fewer chemicals and less water in cleaning.
- Universal Height
- One-piece decorative high profile skirted toilet with tank
- Elongated front bowl with SoftClose® seat (SS224)
- Chrome trip lever
- 12" Unifit rough-in (included), less supply

MODELS

- MS974224CEFG
 With SanaGloss ceramic glaze, SS224 SoftClose
 seat included
- MS974214CEF Less SanaGloss, SS224 SoftClose seat included
- TSU03W.10 10" Unifit rough-in (sold separately)
- TSU03W.14 14" Unifit rough-in (sold separately)

COLORS/FINISHES

Standard

#01 Cotton

#03 Bone

#11 Colonial White

#12 Sedona Beige

#51 Ebony (not available in SanaGloss)

PRODUCT SPECIFICATION

The one-piece low consumption Double Cyclone flushing system toilet shall be 1.28GPF/4.8LPF. Toilet shall have optional SanaGloss ceramic glaze and be at Universal Height. Toilet shall be of skirted design with high-profile tank, elongated front bowl with SoftClose seat and Chrome trip lever. Toilet shall be TOTO Model MS974224CEF_____.



SanaGloss

CACFONE.

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA Watersense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant (when installed with trip lever located on the approach side)







Eco Guinevere® One-Piece Toilet, 1.28GPF

SPECIFICATIONS

1.28 GPF/4.8LPF Water Use Flush System Double Cyclone® Min. Water Pressure 8 psi (static) 7-7/8" x 9-7/8" Water Surface

Trap Diameter 2-1/8"

Rough-in 12" (Standard), 10", 14"

Trap Seal 2-3/16"

Warranty One Year Limited Warranty

Material Vitreous china 120 lbs. Shipping Weight


32" L X 20"W X 17-3/4" H1 Shipping Dimensions


X 28-3/4" H²


INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

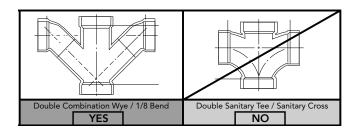

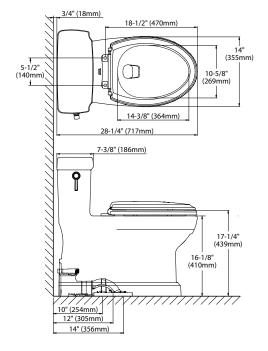



TOTO:

These dimensions and specifications are subject to change without notice