


CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS



Crystorama.com


ASSEMBLY INSTRUCTION MODEL ADD-319-CH-AU

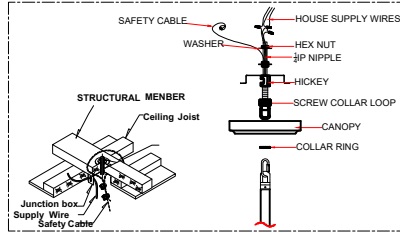




All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 20 Candelabra Base Bulb
40 Watts Recommended 60 Watts Max.
USE LED BULBS FOR EXTENDED USE
(This fixture is Dry rated)

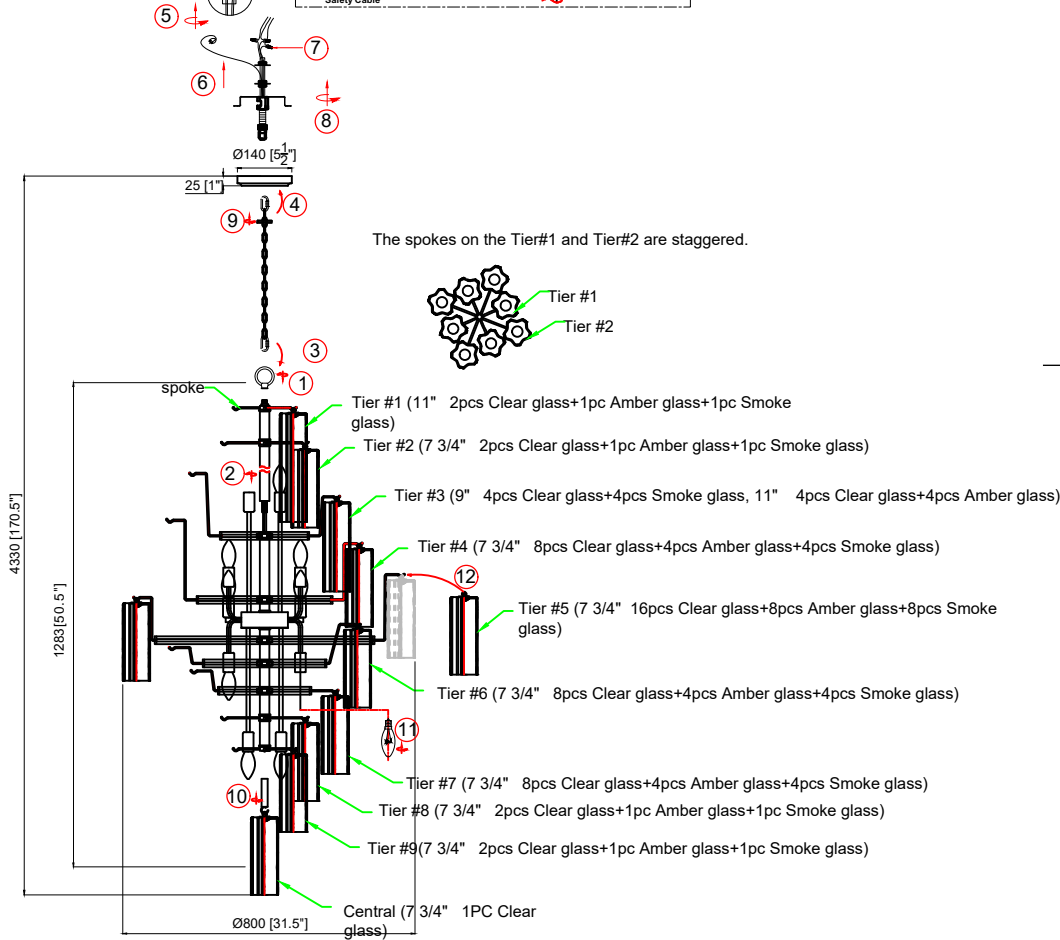

The spokes on the Tier#1 and Tier#2 are staggered.

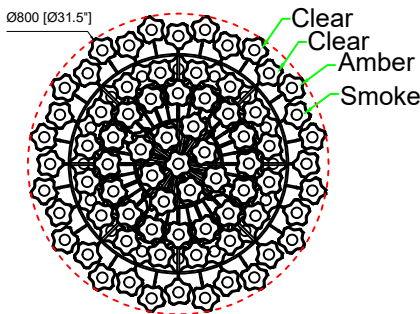

Tier 3 assemble diagram

How to Install

1. Decide the preferred hanging height and choose the correct length of chain needed. Screw the loop onto the top stem. Screw the top stem and bottom short stem onto the frame. Please make sure that the spokes on Tier #1 is staggered in between the spokes on Tier #2 as illustrated.
3. Attach one end of the 1/4 IPS threaded pipe provided onto the ceiling joist and secure with hex nut. The other end should protrude through the outlet box as shown.
4. Assemble the screw collar loop, nipple hex nut and hickey to the 1/4 IPS threaded pipe and adjust overall length to allow the collar ring to hold the canopy flush to ceiling.
5. Attach one end of the chain to the fixture loop by opening the quick link. Slide the screw collar ring over the upper end of the chain and through the canopy. Open the opposite quick link and lift the fixture to attach the screw collar loop to the quick link. Secure the link.
6. Feed the fixture wires, ground wires and safety cable through the chain and screw collar loop, exiting through the Hickey. Proceed with the wire connections. Wrap the safety cable around the ceiling joist and secure the cable with the clamp and set screws provided as shown. After wires are connected, thread the screw collar loop onto the nipple. Place the canopy up against the ceiling and lock by tightening the screw collar loop ring.
7. After safely attaching fixture into junction box. Install the short stem onto the bottom of the fixture.
8. Install bulbs and proceed to connecting the power.
9. Dress the glass as illustrated.

Glass Sets

1. 47pcs Clear glass 7 3/4"
2. 23pcs Smoke glass 7 3/4"
3. 23pcs Amber glass 7 3/4"
4. 4 pcs Clear glass 9"
5. 4 pcs Smoke glass 9"
6. 6 pcs Clear glass 11"
7. 5 pcs Amber glass 11"
8. 1 pcs Smoke glass 11"

Assemble glass steps:

Tier #1 - Tier #2 - Tier #3 - Tier #4 - central - Tier #9 - Tier #8 - Tier #7 - Tier #6 - Tier #5

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov

CRYSTORAMA


LIGHTING THE WAY FOR SIXTY YEARS



Crystorama.com

PART NUMBER MODEL **ADD-319-CH-AU**

Part Number

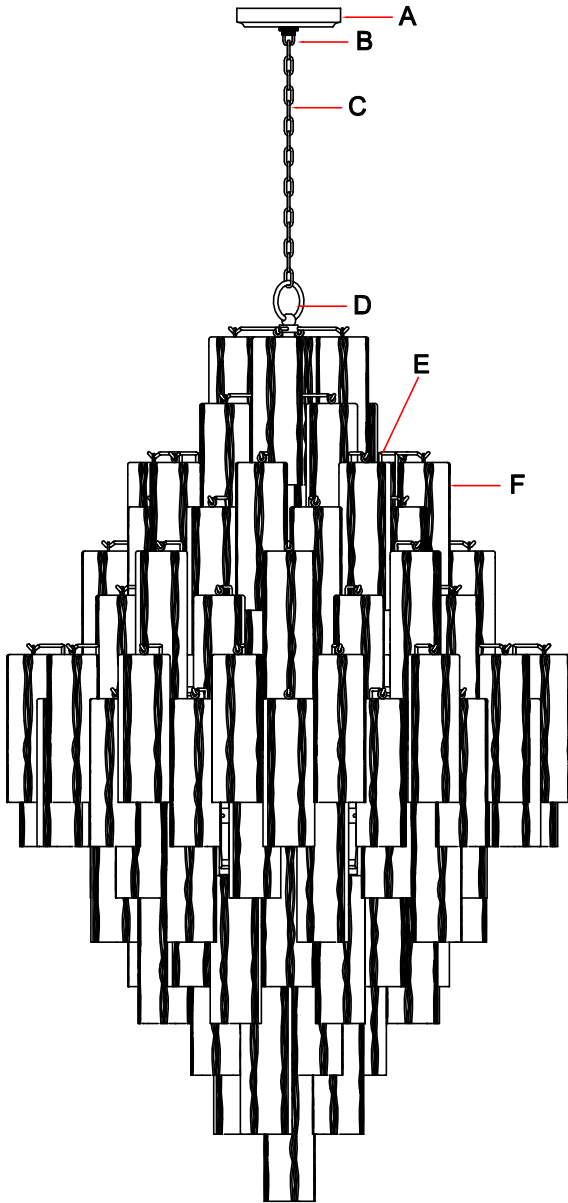

Part Numbers

- A. (1)-Canopy D5.5*H1
(XBN312CHCAN5IN)
- B.(1)-Collar Loop
- C.(1)-Chain D6mm*120"
(XBN319CHCHA6MM)
- D.(1)-Loop
- E.(1)-Frame
- F.(47)-Clear glass D2 3/4 x H7 3/4"
(XBN300CHCLGLA7.75IN)
(23)-Smoke glass D2 3/4 x H7 3/4"
(XBN300CHSMGLA7.75IN)
(23)-Amber glass D2 3/4 x H7 3/4"
(XBN300CHAMGLA7.75IN)
(4)-Clear glass D2 3/4 x H 9"
(XBN319CHCLGLA9IN)
(4)-Smoke glass D2 3/4 x H 9"
(XBN319CHSMGLA9IN)
(6)-Clear glass D2 3/4 x H 11"
(XBN319CHCLGLA11IN)
(5)-Amber glass D2 3/4 x H11"
(XBN319CHAMGLA11IN)
(1)-Smoke glass D2 3/4 x H11"
(XBN319CHSMGLA11IN)